

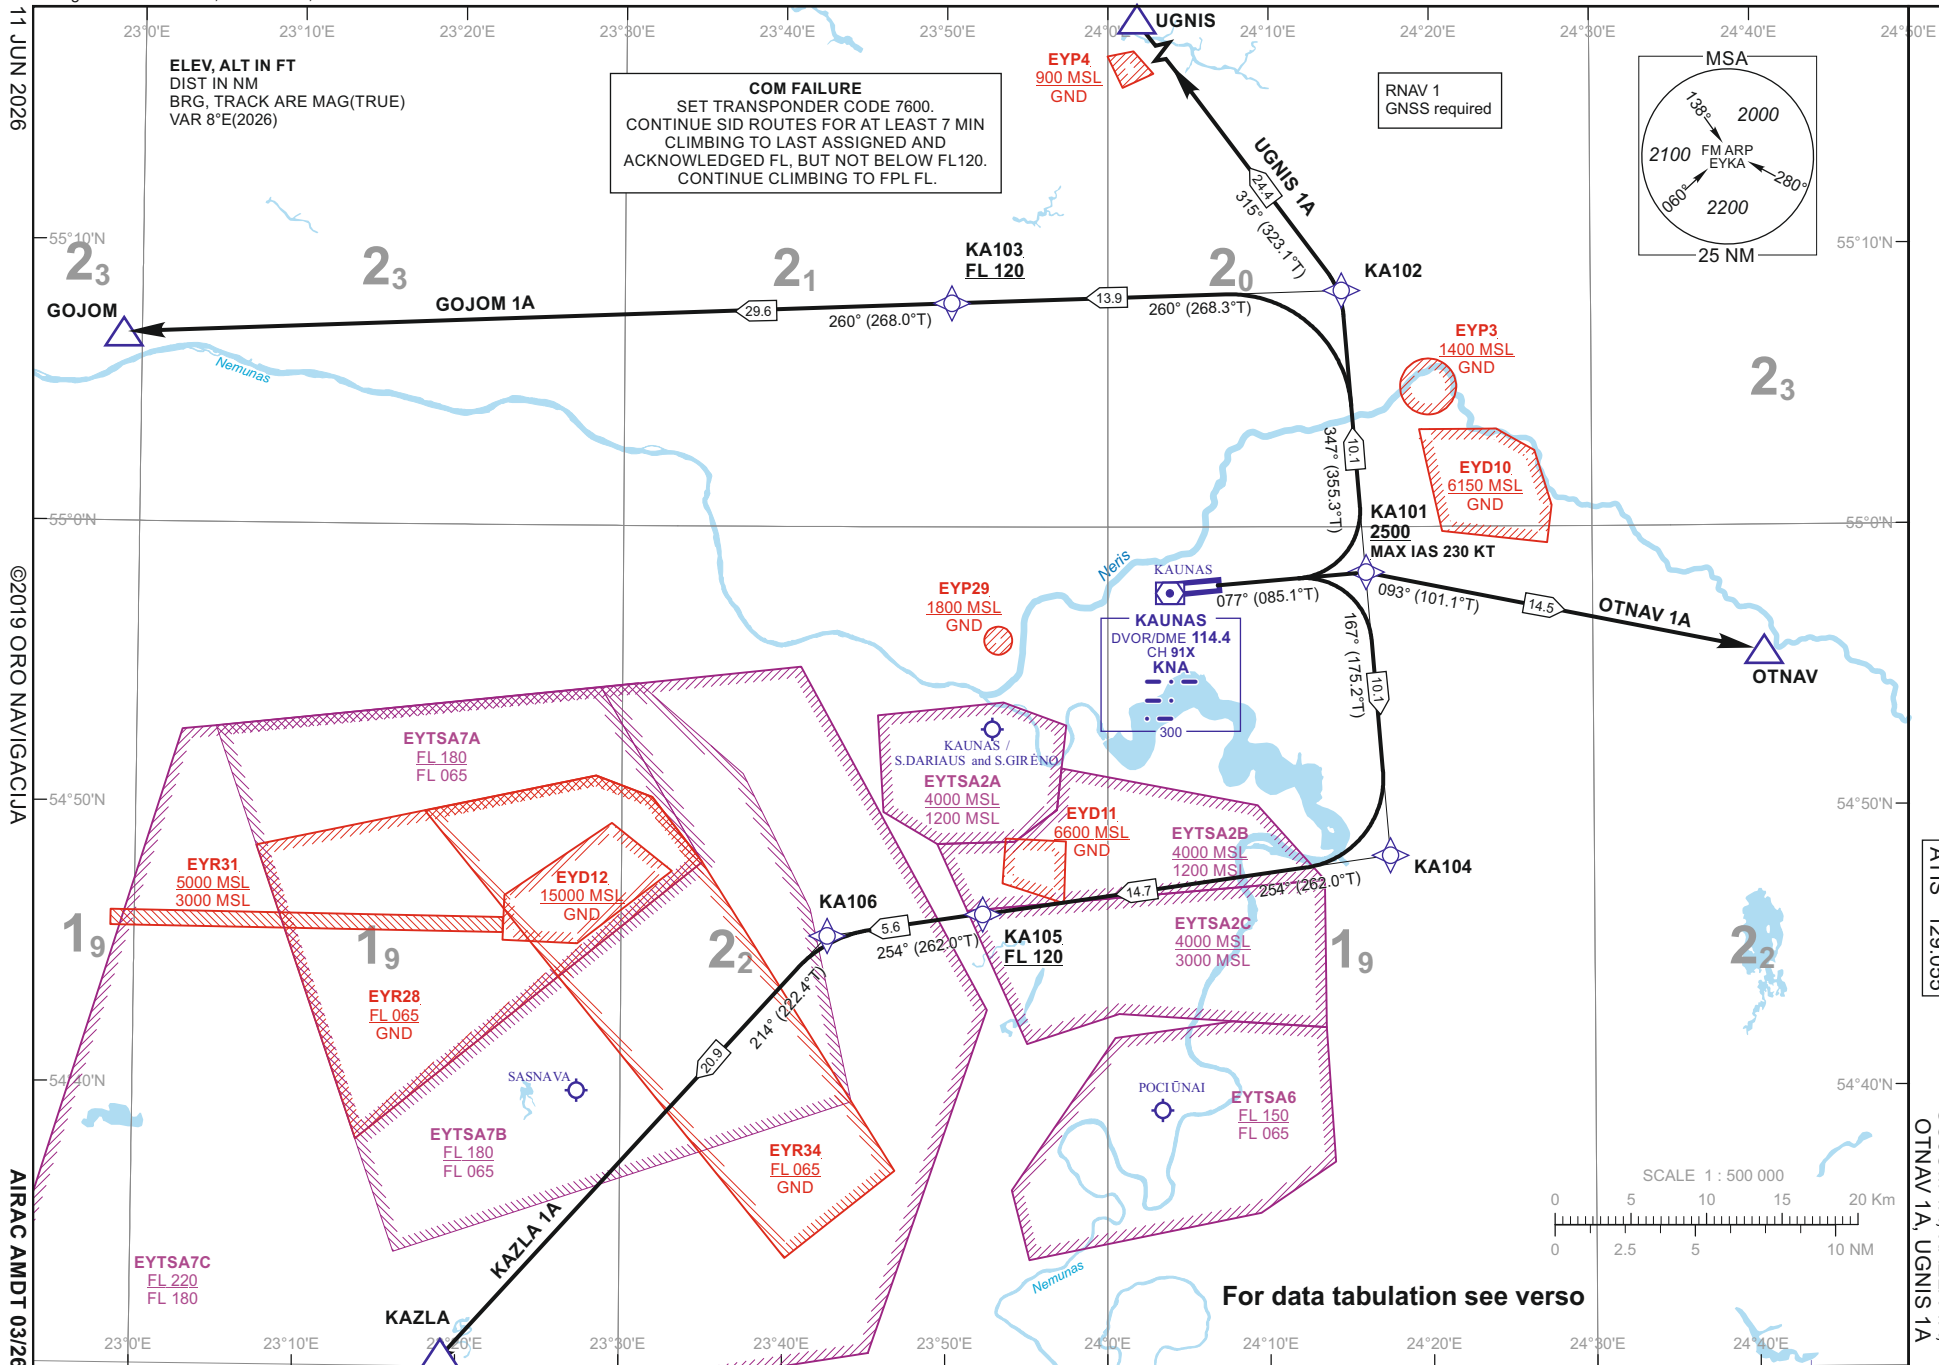


STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAOTRANSITION ALT
5000TWR 124.205
ATIS 129.055KAUNAS (EYKA)
RNAV RMY 08
GOJOM 1A, KAZLA 1A,
OTNAV 1A, UGNIS 1A

For data tabulation see verso

Changes: COM FAILURE; date of VAR; Procedures courses.

ELEV, ALT IN FT
DIST IN NM
BRG, TRACK ARE MAG(TRUE)
VAR 8°E(2026)**COM FAILURE**
SET TRANSPONDER CODE 7600.
CONTINUE SID ROUTES FOR AT LEAST 7 MIN
CLIMBING TO LAST ASSIGNED AND
ACKNOWLEDGED FL, BUT NOT BELOW FL120.
CONTINUE CLIMBING TO FPL FL.RNAV 1
GNSS required

11 JUN 2026

©2019 ORO NAVIGACIJA

AIRAC AMDT 03/26

STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

TRANSITION ALT
5000

KAUNAS (EYKA)
RNAV RWY 08
GOJOM 1A, KAZLA 1A,
OTNAV 1A,UGNIS 1A

TABULAR DESCRIPTION

GOJOM 1A PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL KA101										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	KA101	—	077(085.1)	8.2	5.3	—	+2500	-230	RNAV1
002	TF	KA102	—	347(355.3)	8.2	10.1	—	—	—	RNAV1
003	TF	KA103	—	260(268.3)	8.2	13.9	—	+FL120	—	RNAV1
004	TF	GOJOM	—	260(268.0)	8.2	29.6	—	—	—	RNAV1
KAZLA 1A PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL KA101										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	KA101	—	077(085.1)	8.2	5.3	—	+2500	-230	RNAV1
002	TF	KA104	—	167(175.2)	8.2	10.1	—	—	—	RNAV1
003	TF	KA105	—	254(262.0)	8.2	14.7	—	+FL120	—	RNAV1
004	TF	KA106	—	254(262.0)	8.2	5.6	—	—	—	RNAV1
005	TF	KAZLA	—	214(222.4)	8.1	20.9	—	—	—	RNAV1
OTNAV 1A PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL KA101										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	KA101	—	077(085.1)	8.2	5.3	—	+2500	-230	RNAV1
002	TF	OTNAV	—	093(101.1)	8.6	14.5	—	—	—	RNAV1
UGNIS 1A PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL KA101										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	CF	KA101	—	077(085.1)	8.2	5.3	—	+2500	-230	RNAV1
002	TF	KA102	—	347(355.3)	8.2	10.1	—	—	—	RNAV1
003	TF	UGNIS	—	315(323.1)	8.5	24.4	—	—	—	RNAV1

WAYPOINT COORDINATES			
FIX/POINTS	COORDINATES	FIX/POINTS	COORDINATES
KA101	54 58 21.9N 024 15 57.4E	GOJOM	55 06 43.5N 022 58 51.0E
KA102	55 08 25.0N 024 14 30.9E	KAZLA	54 29 59.3N 023 18 33.8E
KA103	55 07 57.6N 023 50 18.0E	OTNAV	54 55 33.0N 024 40 36.0E
KA104	54 48 17.1N 024 17 25.3E	UGNIS	55 27 50.9N 023 48 44.5E
KA105	54 46 11.9N 023 52 16.7E	KNA	54 57 37.4N 024 03 59.1E
KA106	54 45 24.8N 023 42 42.2E		

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYKA AD 2.22

Changes: VAR: Procedures courses.