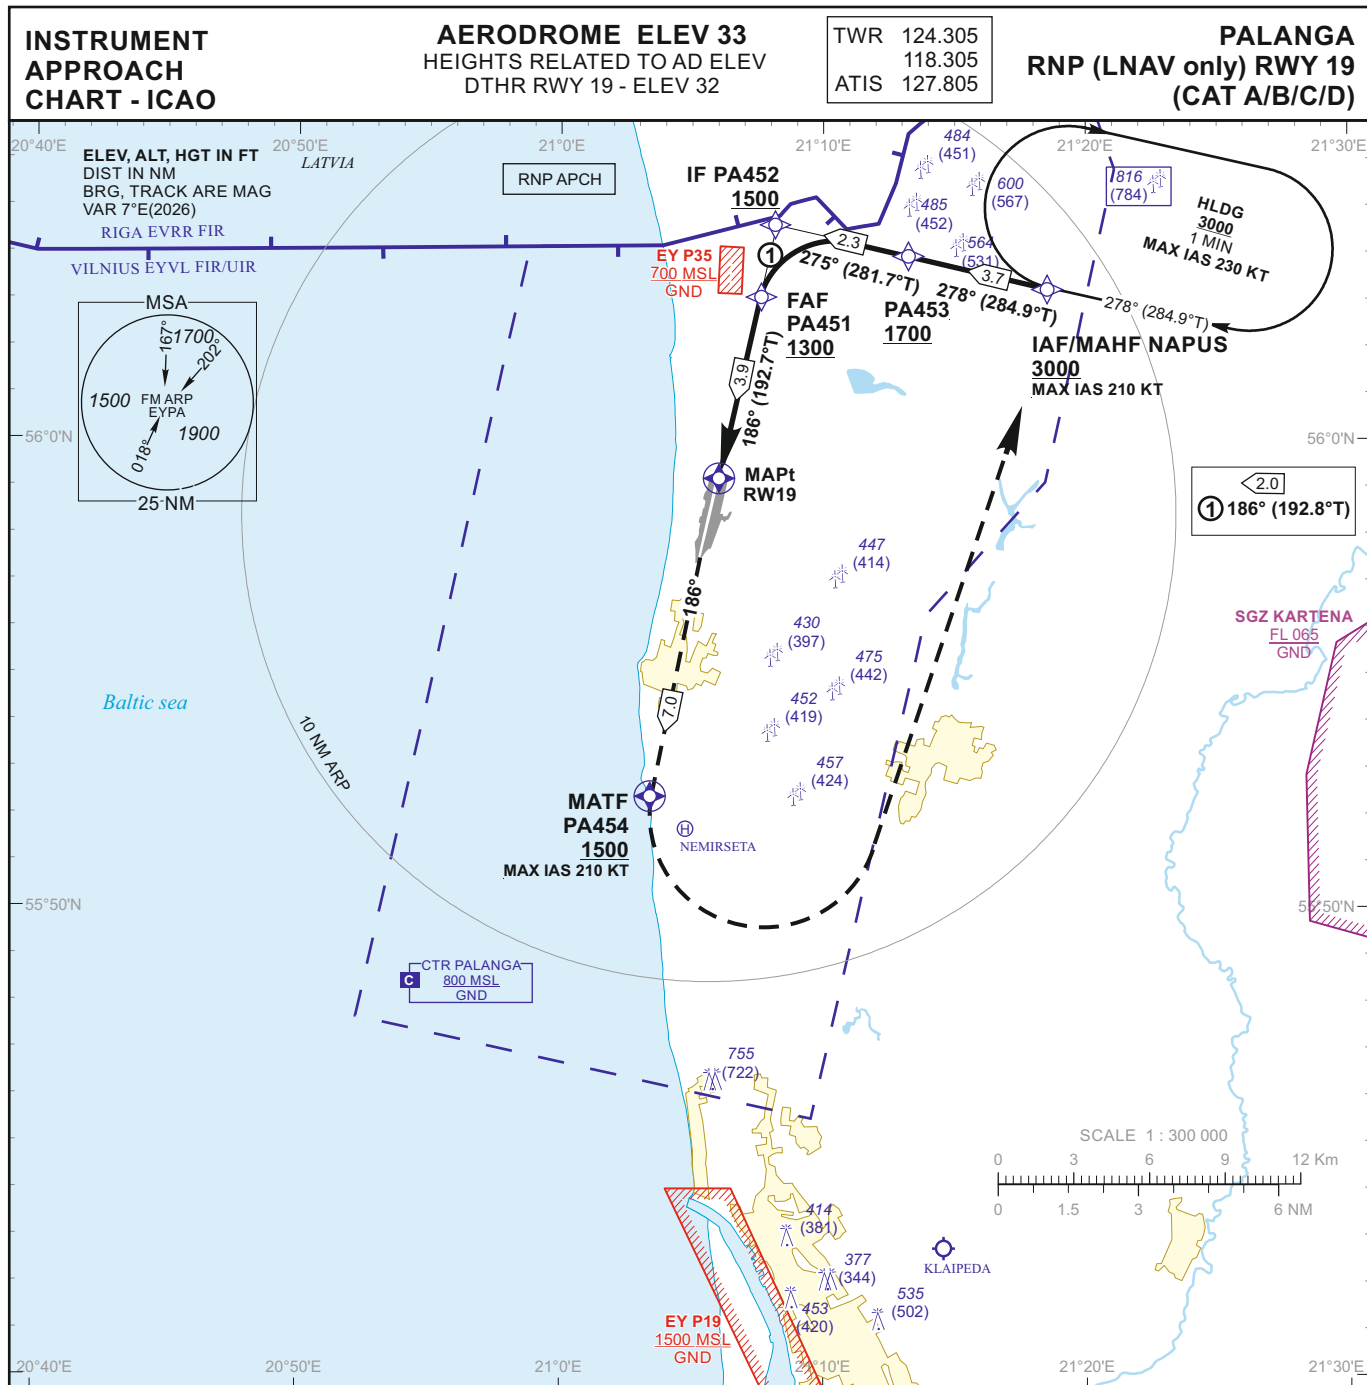


**MISSED APPROACH**


Climb on course 186° to PA454 [A1500+],
then turn left [K210-], direct to NAPUS
climbing to 3000.

TCH 50

DTHR ELEV 32

NM to/from DTHR RWY 19
NM to/from DTHR RWY 19

TRANSITION ALT 5000

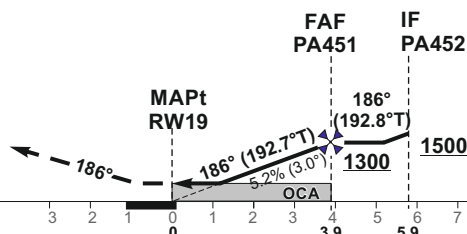

OCA(OCH)		A	B	C	D	DIST TO RW19				3	2		
STRAIGHT-IN APPROACH	LNAV	420 (390)				Altitude				1030	720		
						Timing not authorized for defining the MAPt							
CIRCLING		490 (450)	740 (710)	870 (840)	not authorized	GS	Kts	80	100	120	140	160	180
						FAF-MAPt 3.9 NM	min:sec	2:55	2:20	1:57	1:40	1:28	1:18
						Rate of descent (5.2%)	ft/min	415	520	625	730	835	940
						For data tabulation see verso							

INSTRUMENT
APPROACH
CHART - ICAO

AERODROME ELEV 33

HEIGHTS RELATED TO AD ELEV

DTHR RWY 19 - ELEV 32

PALANGA

RNP (LNAV only) RWY 19

(CAT A/B/C/D)

TABULAR DESCRIPTION											
IAF NAPUS											
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)/ Time	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	VPA/TCH	Navigation Specification
001	IF	NAPUS	—	—	6.6	—	—	+3000	-210	—	RNP APCH
002	TF	PA453	—	278(284.9)	6.6	3.7	—	+1700	—	—	RNP APCH
003	TF	PA452	—	275(281.7)	6.6	2.3	—	+1500	—	—	RNP APCH
004	TF	PA451	—	186(192.8)	6.6	2.0	—	+1300	—	—	RNP APCH
005	TF	RW19	Y	186(192.7)	6.6	3.9	—	@420	—	-3.00/50	RNP APCH
006	CF	PA454	Y	186(192.7)	6.6	7.0	—	+1500	-210	—	RNP APCH
007	DF	NAPUS	—	—	6.6	—	L	+3000	-210	—	RNP APCH
008	HM	NAPUS	—	278(284.9)	6.6	1 min	R	+3000	-230	—	RNAV 1

FIX/POINTS	COORDINATES
NAPUS (IAF/MAHF)	56 03 12.1N 021 18 32.7E
PA453	56 04 08.3N 021 12 13.2E
PA452 (IF)	56 04 36.6N 021 08 08.6E
PA451 (FAF)	56 02 39.6N 021 07 21.2E
RW19 (MAPt)	55 58 54.36N 021 05 50.27E
PA454 (MATF)	55 52 05.5N 021 03 05.9E