



for MILITARY ACFT  
TRANSITION LEVEL By ATC  
TRANSITION ALT **5000(4553)**

**AERODROME ELEV 447**  
HEIGHTS RELATED TO AD ELEV  
THR RWY 14R - ELEV 440

TWR 120.405  
ATIS 120.755

ŠIAULIAI (EYSA)  
TACAN  
RWY 14R (MIL)

|                     |                    |                 |                            |                |                    |                   |                     |
|---------------------|--------------------|-----------------|----------------------------|----------------|--------------------|-------------------|---------------------|
| TACAN<br>SQQ CH110X | APP COURSE<br>135° | FAF ALT<br>2300 | Descent GP<br>5.2% (3.00°) | <b>MDA 840</b> | TDZE<br><b>440</b> | ALS<br><b>OUT</b> | LDA<br><b>10643</b> |
|---------------------|--------------------|-----------------|----------------------------|----------------|--------------------|-------------------|---------------------|

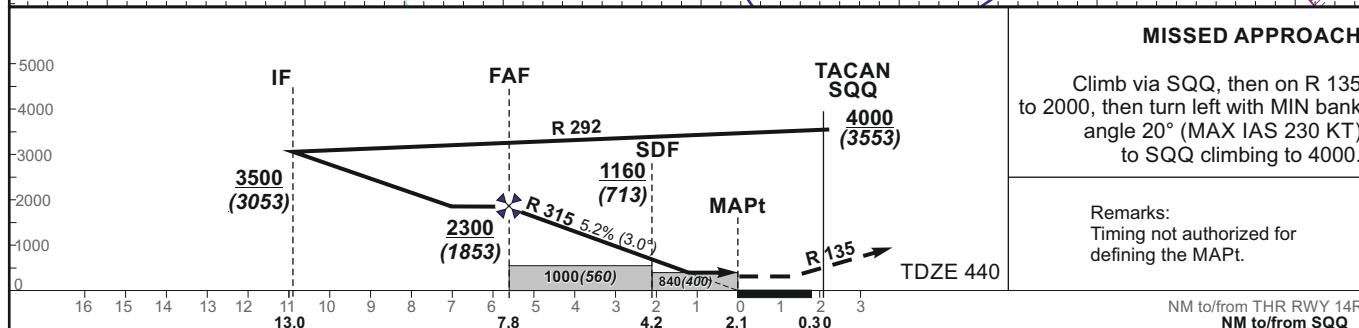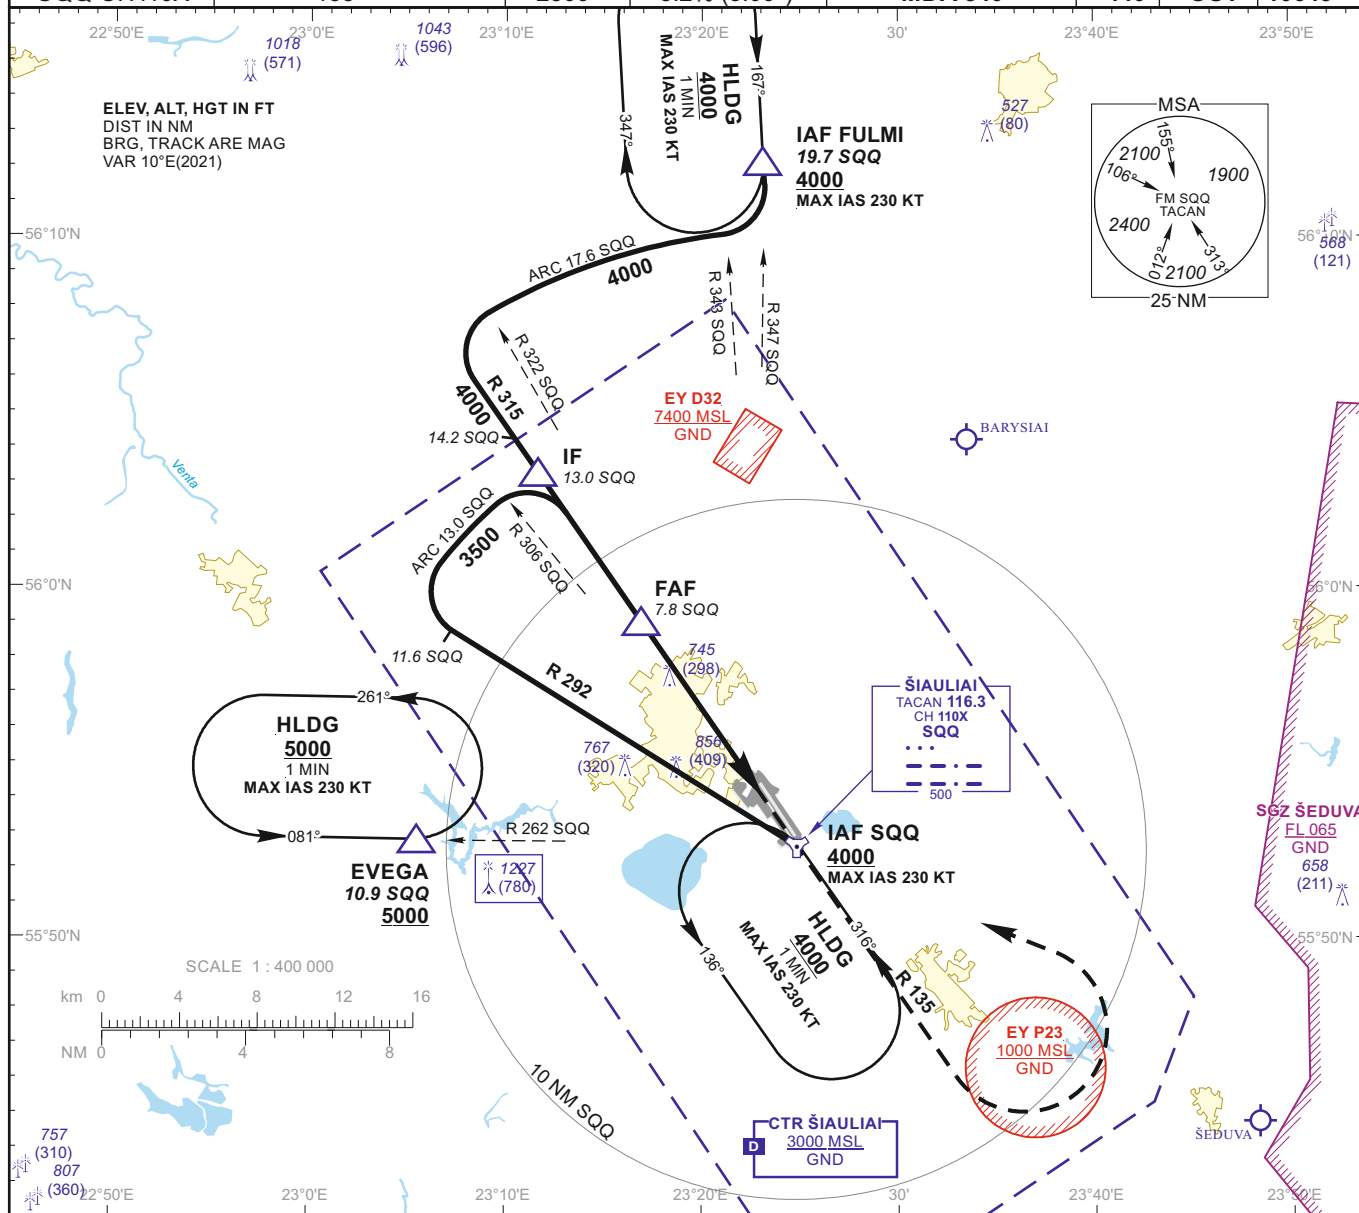

|                        |                      |           |           |                               |           |            |            |                   |           |        |       |       |       |            |       |   |
|------------------------|----------------------|-----------|-----------|-------------------------------|-----------|------------|------------|-------------------|-----------|--------|-------|-------|-------|------------|-------|---|
| GS                     | Kts                  | 80        | 100       | 120                           | 140       | 160        | 180        | DIST SQQ          | 7         | 6      | 5     | 4     | 3     |            |       |   |
| FAF - MAPt 5.7 NM      | min:sec              | 4:16      | 3:25      | 2:51                          | 2:26      | 2:08       | 1:54       | Altitude          | 2040      | 1730   | 1410  | 1100  | 780   |            |       |   |
| Rate of descent (5.2%) | ft/min               | 415       | 520       | 625                           | 730       | 835        | 940        | Height            | (1593)    | (1283) | (963) | (653) | (333) |            |       |   |
|                        | STRAIGHT-IN APPROACH |           |           |                               |           |            |            | CIRCLING APPROACH |           |        |       |       |       |            |       |   |
|                        | TACAN                |           |           | TACAN (When SDF not received) |           |            | MDA(H)     | Visibility        |           |        |       |       |       |            |       |   |
|                        | MDA(H)               | Full      | ALS out   | MDA(H)                        | Full      | ALS out    |            |                   |           |        |       |       |       |            |       |   |
|                        | A                    | 840 (400) | RVR 1100m | 1000 (560)                    | RVR 2000m | RVR 2700m  | 880 (440)  | 1500m             | A         |        |       |       |       |            |       |   |
|                        | B                    |           |           |                               |           |            | 1160 (710) | 2400m             | B         |        |       |       |       |            |       |   |
|                        | C                    |           |           |                               |           |            | RVR 1800m  | RVR 2200m         | RVR 2900m |        |       |       |       | 1260 (810) | 3600m | C |
|                        | D                    |           |           |                               |           |            |            |                   |           |        |       |       |       |            |       | D |
| E                      |                      |           |           |                               |           | 1350 (910) | 4300m      | E                 |           |        |       |       |       |            |       |   |

