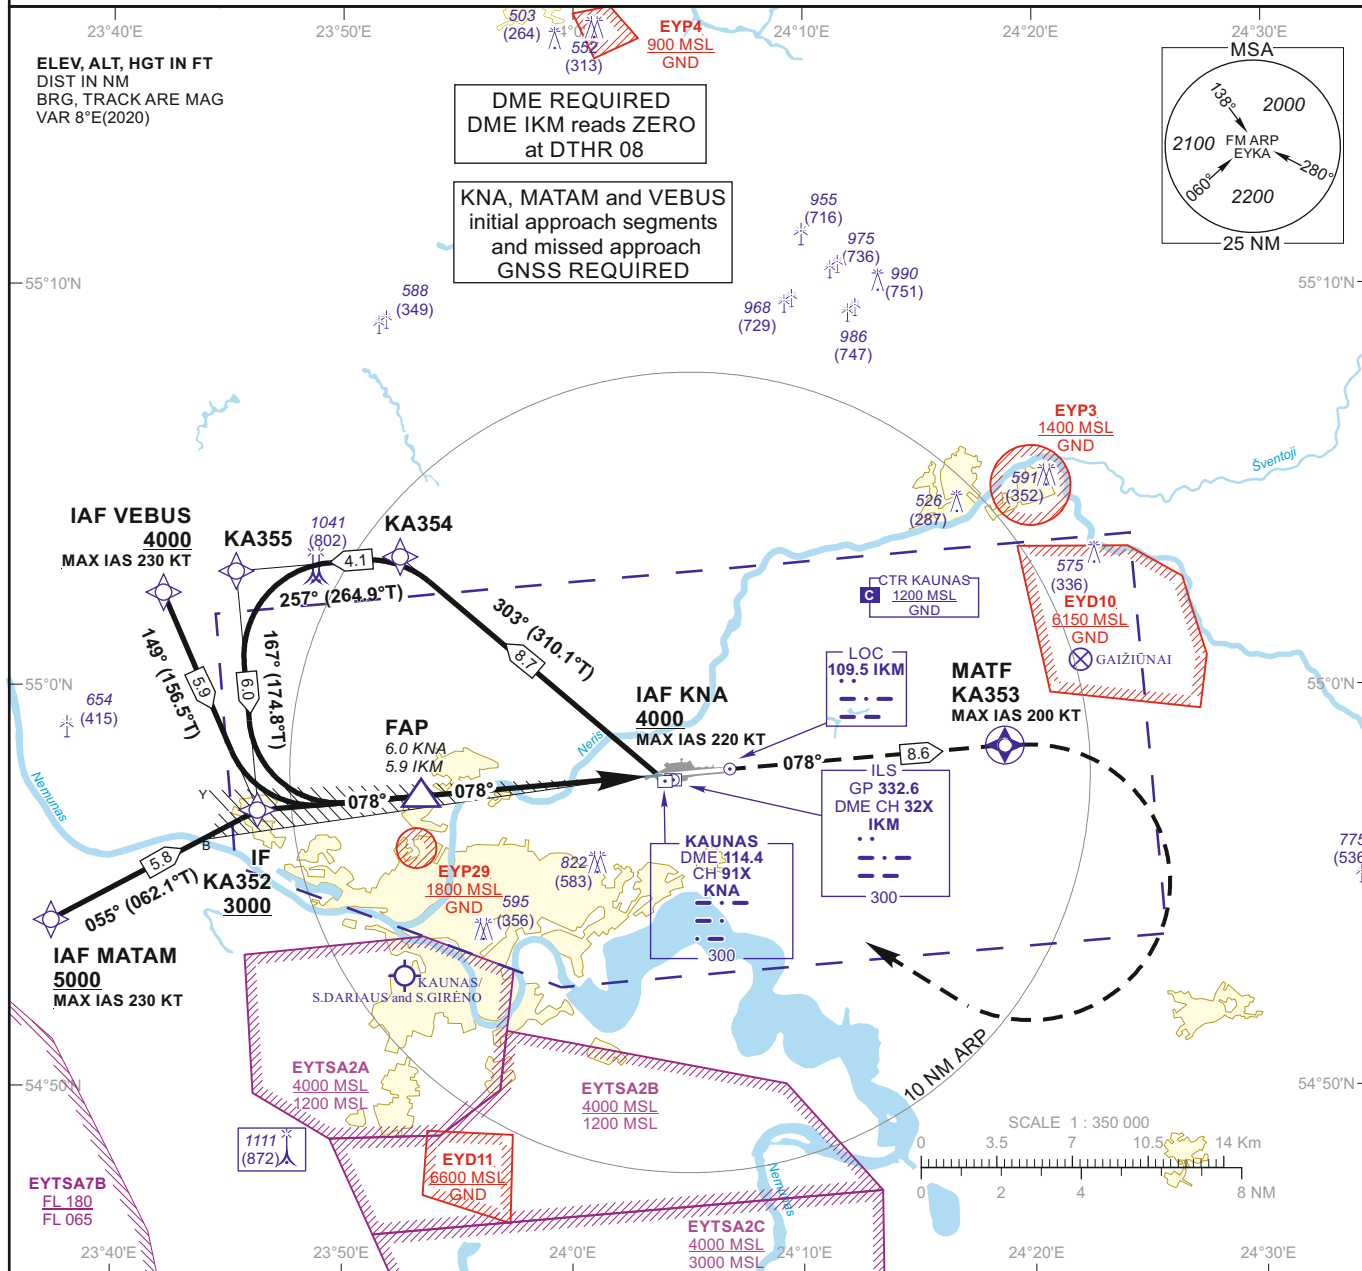


**INSTRUMENT
APPROACH
CHART - ICAO**
AERODROME ELEV 259

 HEIGHTS RELATED TO
DTHR RWY 08 - ELEV 239

 TWR 124.205
ATIS 129.055

**KAUNAS (EYKA)
ILS Z RWY 08
(CAT A/B/C/D)**


TRANSITION ALT 5000

MISSED APPROACH

 Climb on course 078° to KA353,
then turn right [K200-], direct to IAF KNA
climbing to 4000.

ILS RDH 51

DTHR ELEV 239

 NM to/from DTHR RWY 08
NM to/from DME KNA
NM to/from DME IKM

OCA(OCH)		A	B	C	D	DIST DME IKM		5	4	3	2			
STRAIGHT-IN APPROACH	ILS CAT I	505 (266)	518 (279)	526 (287)	536 (297)	Altitude		1870	1560	1240	930			
						Height		(1631)	(1321)	(1001)	(691)			
CIRCLING		730 (470)	760 (500)	1230 (970)	not authorized									
						GS		Kts	80	100	120	140	160	180
						FAP-DTHR 5.9 NM		min:sec	4:25	3:32	2:57	2:32	2:13	1:58
						Rate of descent (5.2%)		ft/min	415	520	625	730	835	940
						For data tabulation see verso								

Changes: EYP37 and EYP38 withdrawn; OCA(H); obstacles; scale.

INSTRUMENT
APPROACH
CHART - ICAO

AERODROME ELEV 259
HEIGHTS RELATED TO
DTHR RWY 08 - ELEV 239

KAUNAS (EYKA)
ILS Z RWY 08
(CAT A/B/C/D)

TABULAR DESCRIPTION

IAF KNA, INITIAL APPROACH											
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)/ Time	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	VPA/TCH	Navigation Specification
001	IF	KNA	—	—	7.5	—	—	+4000	-220	—	RNAV 1
002	TF	KA354	—	303(310.1)	7.5	8.7	—	—	—	—	RNAV 1
003	TF	KA355	—	257(264.9)	7.5	4.1	—	—	—	—	RNAV 1
004	TF	KA352	—	167(174.8)	7.5	6.0	—	+3000	—	—	RNAV 1
IAF MATAM, INITIAL APPROACH											
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)/ Time	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	VPA/TCH	Navigation Specification
001	IF	MATAM	—	—	7.5	—	—	+5000	-230	—	RNAV 1
002	TF	KA352	—	055(062.1)	7.5	5.8	—	+3000	—	—	RNAV 1
IAF VEBUS, INITIAL APPROACH											
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)/ Time	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	VPA/TCH	Navigation Specification
001	IF	VEBUS	—	—	7.5	—	—	+4000	-230	—	RNAV 1
002	TF	KA352	—	149(156.5)	7.5	5.9	—	+3000	—	—	RNAV 1
MISSED APPROACH											
001	—	RW08	—	—	7.5	—	—	—	—	—	RNAV 1
002	CF	KA353	Y	078(085.27)	7.5	8.60	—	—	-200	—	RNAV 1
003	DF	KNA	—	—	7.5	—	R	+4000	-220	—	RNAV 1

FIX/POINTS	COORDINATES	FIX FORMATION
MATAM (IAF)	54 54 08.9N 023 37 22.7E	
VEBUS (IAF)	55 02 19.2N 023 42 11.7E	
KNA (IAF)	54 57 37.4N 024 03 59.1E	
KA354	55 03 12.8N 023 52 27.9E	
KA355	55 02 51.2N 023 45 21.8E	
KA352 (IF)	54 56 52.8N 023 46 18.3E	10.22 NM KNA ; BRG 077.57° / 10.15 NM IKM
FAP	54 57 15.6N 023 53 38.8E	5.97 NM KNA ; BRG 077.57° / 5.90 NM IKM
RW08 (DTHR)	54 57 46.44N 024 03 50.94E	
KA353 (MATF)	54 58 29.9N 024 18 43.4E	
DME IKM	54 57 42.8N 024 0408.4E	
LOC IKM	54 57 55.25N 024 06 49.06E	