
STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

TRANSITION ALT 5000

TWR 124.305
118.305
ATIS 127.805

PALANGA (EYPA) RNAV RWY 01

CUGLA 1A, TIRIN 1C, UGFOS 1A, UPNAN 1A

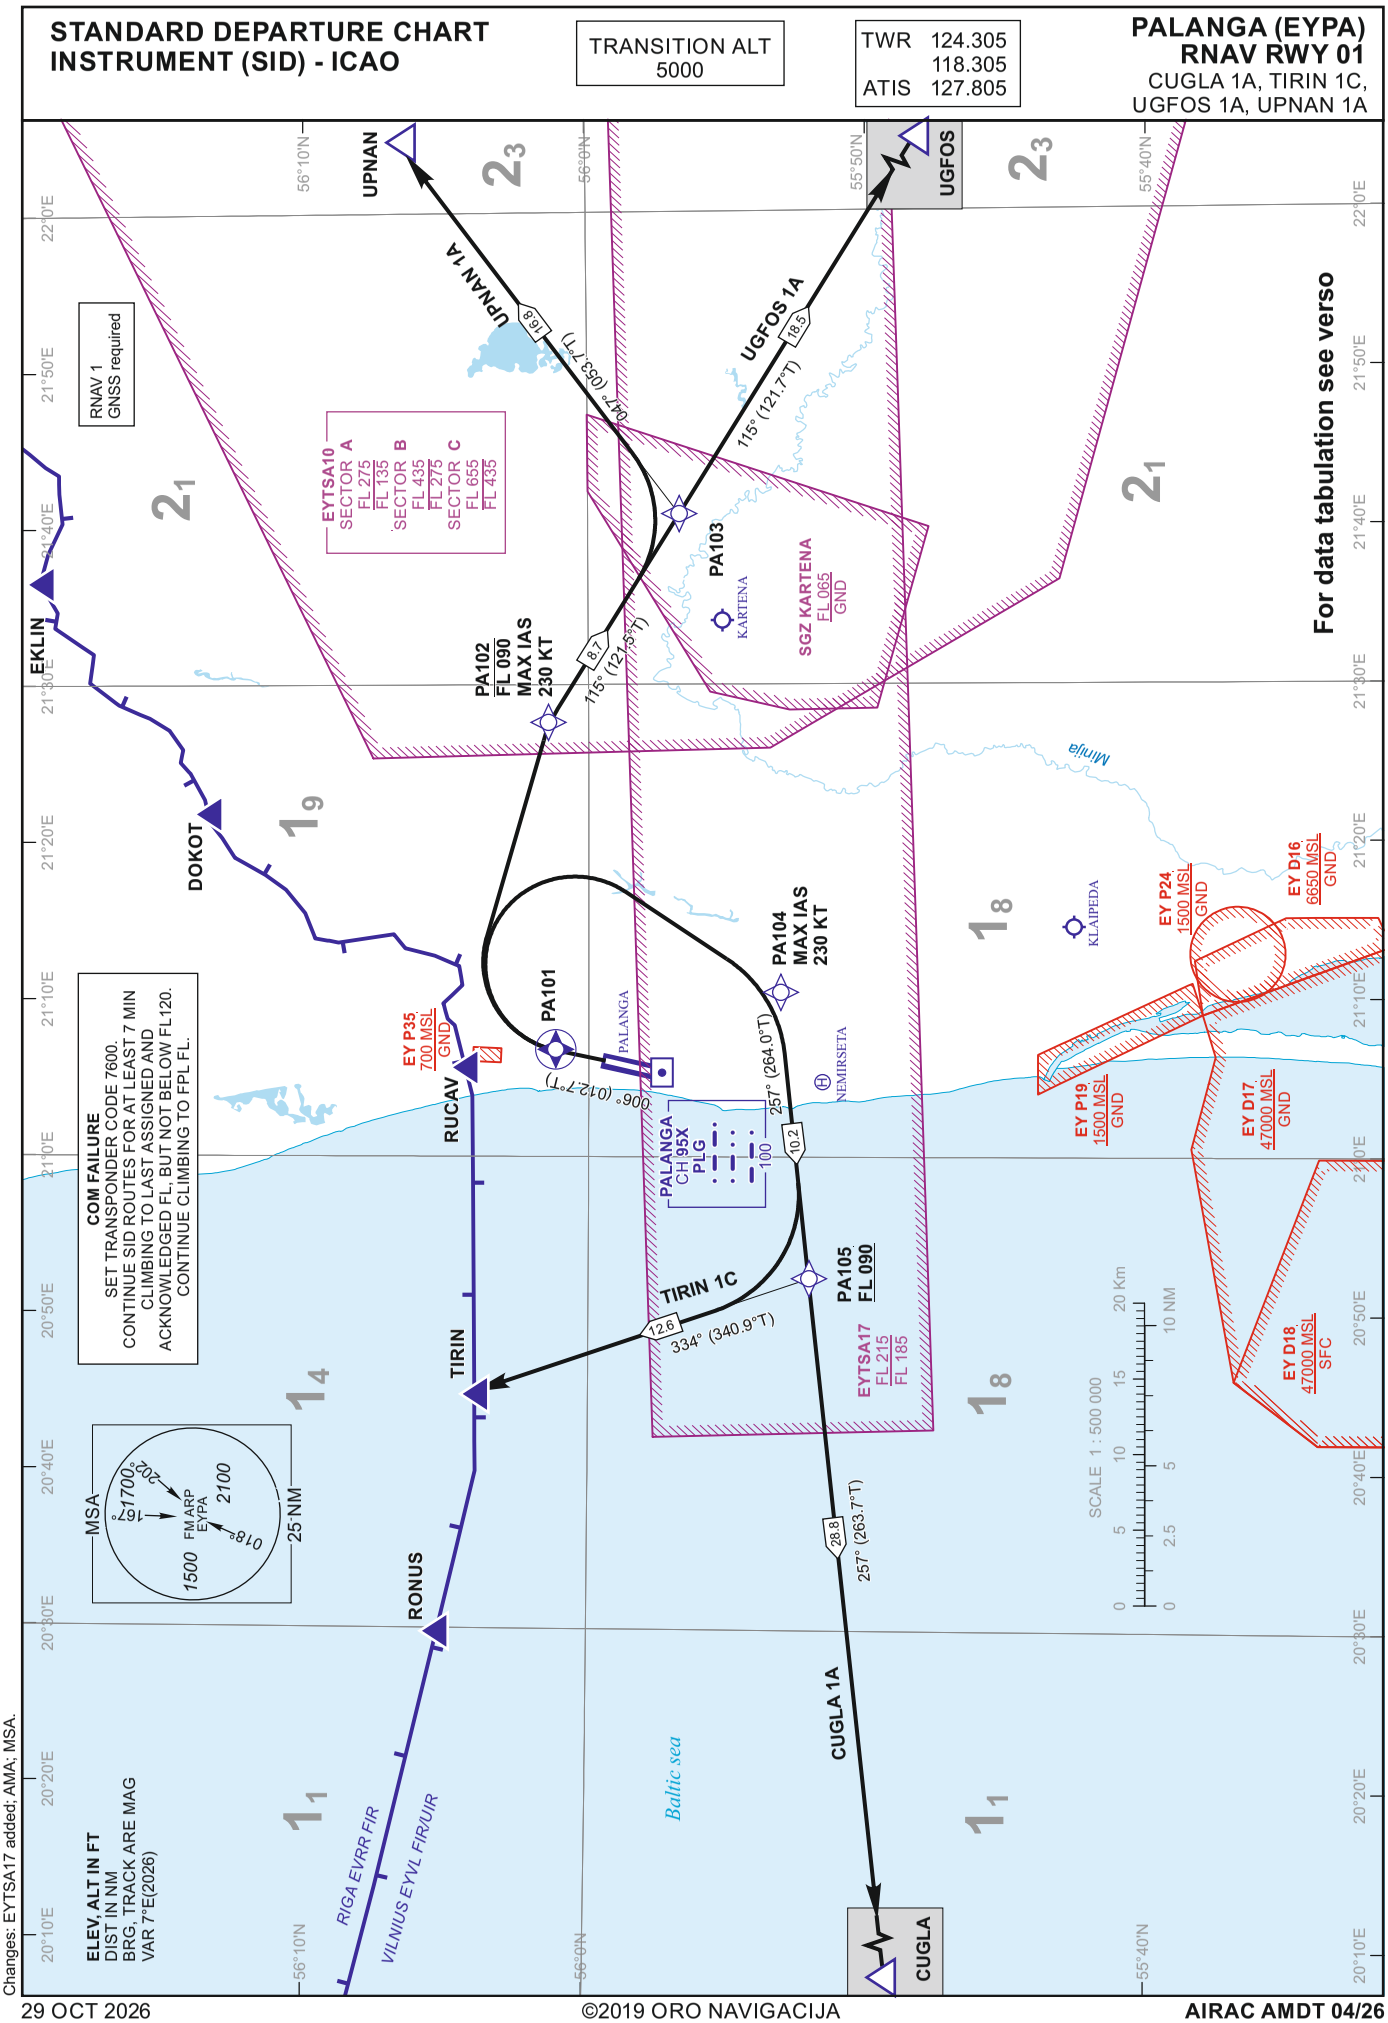

Changes: EYTSA17 added; AMA; MSA.

©2019 ORO NAVIGACIJA

STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

TRANSITION ALT 5000

PALANGA (EYPA) RNAV RWY 01
CUGLA 1A, TIRIN 1C, UGFOS 1A, UPNAN 1A

TABULAR DESCRIPTION

CUGLA 1A PDG 7.7% REQUIRED DUE TO OPERATIONAL REASONS UNTIL PA101

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	CF	PA101	Y	006(012.7)	6.6	2.0	—	—	—	RNAV1
002	DF	PA104	—	—	6.6	—	R	—	-230	RNAV1
003	TF	PA105	—	257(264.0)	6.6	10.2	—	+FL090	—	RNAV1
004	TF	CUGLA	—	257(263.7)	7.5	28.8	—	—	—	RNAV1

TIRIN 1C PDG 7.7% REQUIRED DUE TO OPERATIONAL REASONS UNTIL PA101

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	CF	PA101	Y	006(012.7)	6.6	2.0	—	—	—	RNAV1
002	DF	PA104	—	—	6.6	—	R	—	-230	RNAV1
003	TF	PA105	—	257(264.0)	6.6	10.2	—	+FL090	—	RNAV1
004	TF	TIRIN	—	334(340.9)	6.6	12.6	—	—	—	RNAV1

UGFOS 1A PDG 7.7% REQUIRED DUE TO OPERATIONAL REASONS UNTIL PA101

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	CF	PA101	Y	006(012.7)	6.6	2.0	—	—	—	RNAV1
002	DF	PA102	—	—	6.6	—	R	-FL090	-230	RNAV1
003	TF	PA103	—	115(121.5)	6.6	8.7	—	—	—	RNAV1
004	TF	UGFOS	—	115(121.7)	8.1	18.5	—	—	—	RNAV1

UPNAN 1A PDG 7.7% REQUIRED DUE TO OPERATIONAL REASONS UNTIL PA101

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	CF	PA101	Y	006(012.7)	6.6	2.0	—	—	—	RNAV1
002	DF	PA102	—	—	6.6	—	R	-FL090	-230	RNAV1
003	TF	PA103	—	115(121.5)	6.6	8.7	—	—	—	RNAV1
004	TF	UPNAN	—	047(053.7)	8.2	16.8	—	—	—	RNAV1

WAYPOINT COORDINATES			
FIX/POINTS	**COORDINATES**	**FIX/POINTS**	**COORDINATES**
PA101	56 00 55.9N 021 06 39.3E	**CUGLA**	55 48 48.6N 020 01 29.9E
PA102	56 01 09.3N 021 27 16.5E	**TIRIN**	56 04 02.2N 020 44 52.2E
PA103	55 56 36.3N 021 40 28.1E	**UGFOS**	55 46 52.0N 022 08 18.7E
PA104	55 53 12.6N 021 10 17.1E	**UPNAN**	56 06 27.9N 022 04 35.9E
PA105	55 52 07.8N 020 52 14.3E	**PLG**	55 57 23.5N 021 05 13.4E

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYPA AD 2.22

Changes: VAR; Procedures courses.

©2019 ORO NAVIGACIJA