
STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

TRANSITION ALT 5000

TWR	124.305
	118.305
ATIS	127.805

PALANGA RWY 01

MANUX 1A, TIRIN 1A, VALUV 1A, XARIN 1A

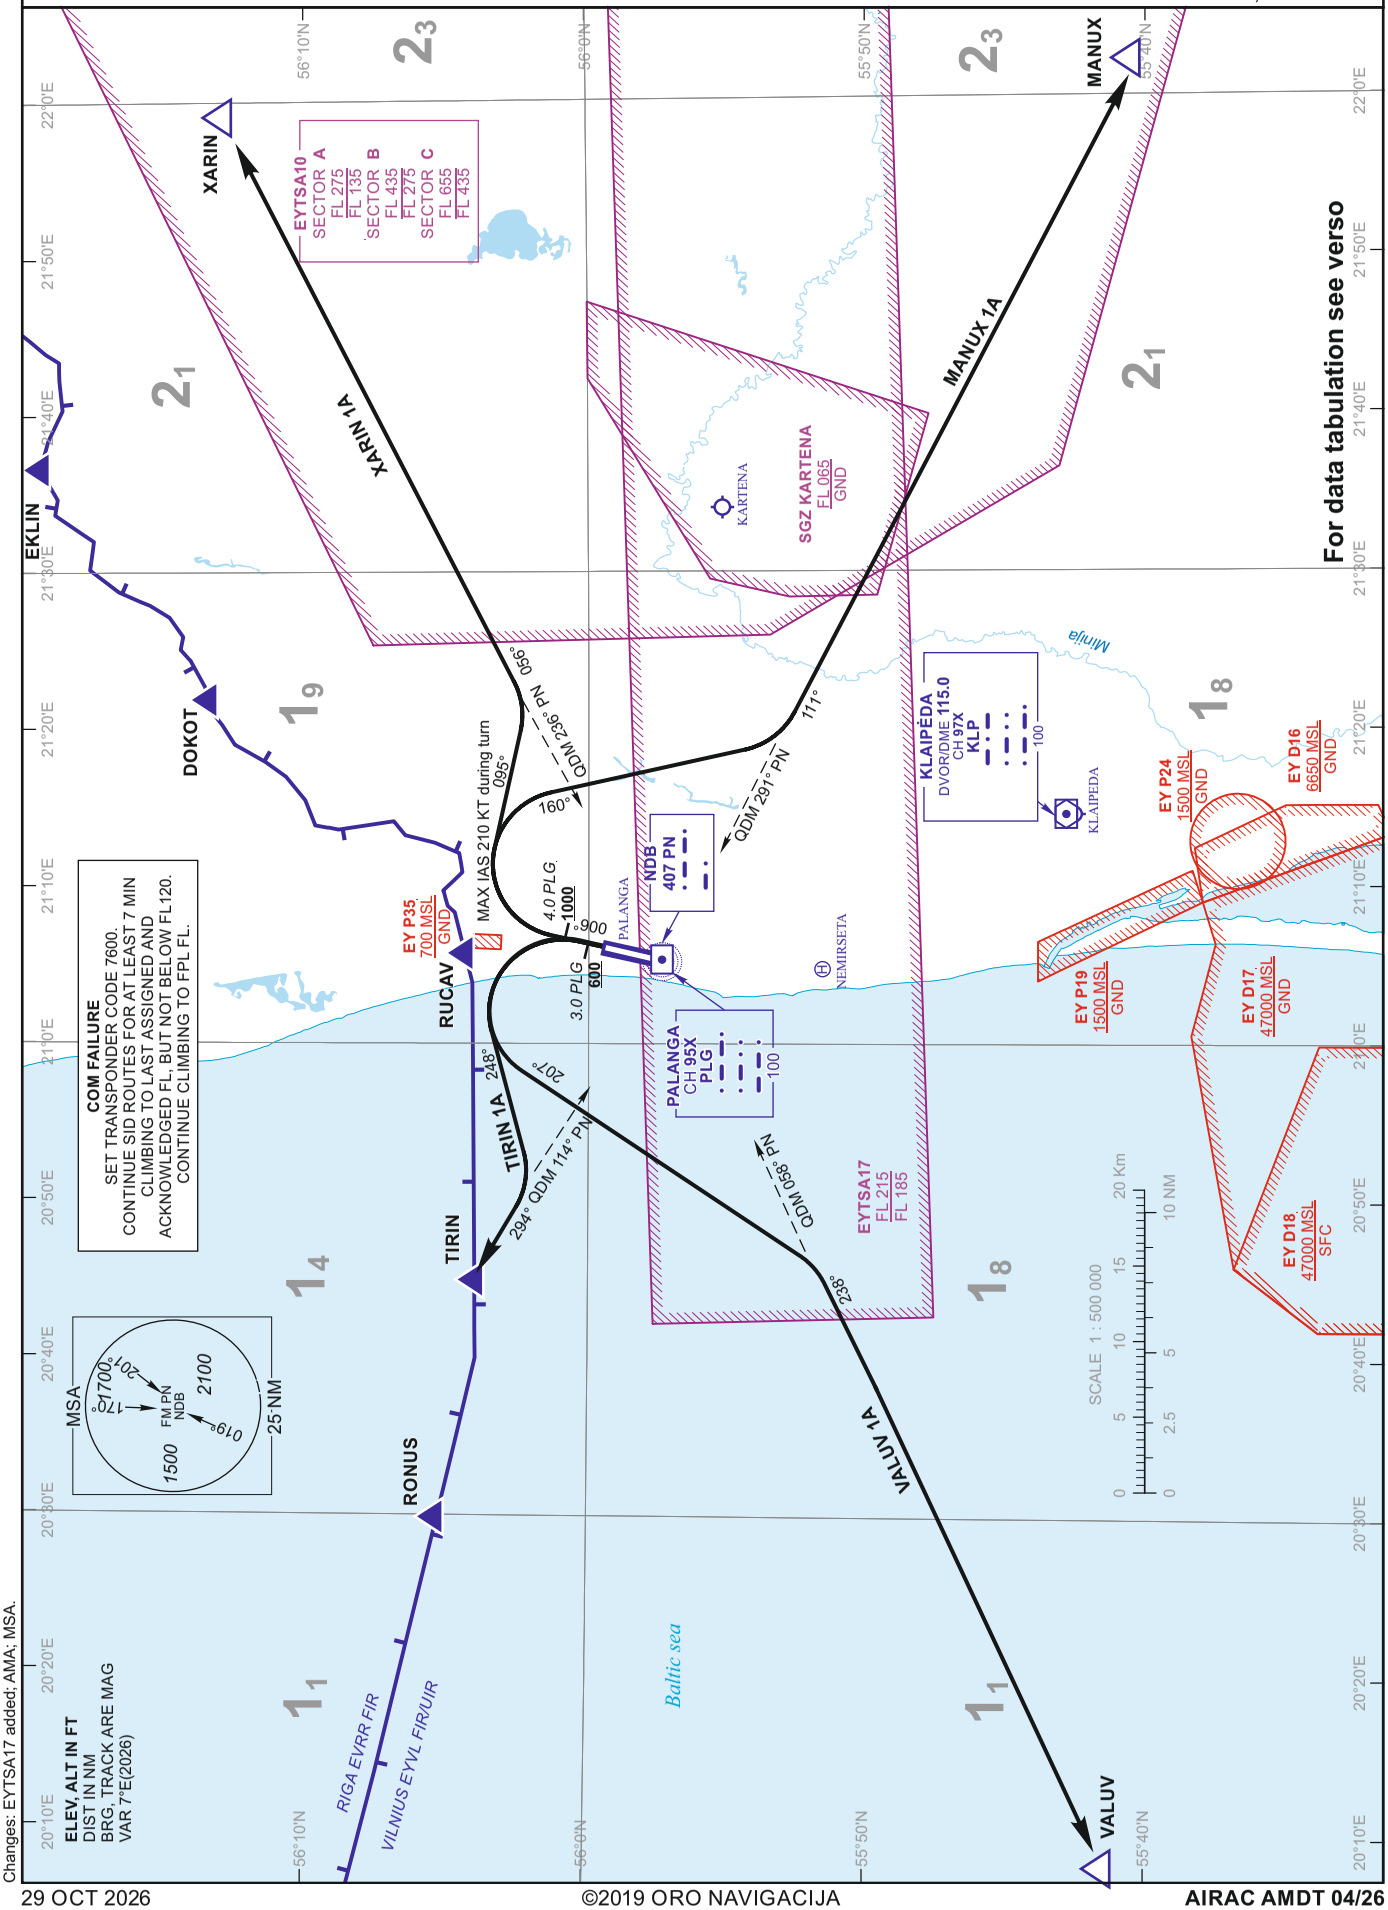

ELEV, ALT IN FT
DIST IN NM
BRG, TRACK ARE MAG
VAR 7°E(2026)

Changes: EYTSA17 added; AMA; MSA.

©2019 ORO NAVIGACIJA

PALANGA
SID RWY 01

TABULAR DESCRIPTION

STANDARD INSTRUMENT DEPARTURE (SID) ROUTES

SID NAME	ROUTE
MANUX 1A	Climb on RWY track to 4.0 DME PLG (at 1000 FT MSL or above). Turn right (MAX IAS 210 KT) to track 160°. Intercept QDM 291° PN, proceed to MANUX.
TIRIN 1A	Climb on RWY track to 3.0 DME PLG (at 600 FT MSL or above). Turn left (MAX IAS 210 KT) to track 248°. Intercept QDM 114° PN, proceed to TIRIN.
VALUV 1A	Climb on RWY track to 3.0 DME PLG (at 600 FT MSL or above). Turn left (MAX IAS 210 KT) to track 207°. Intercept QDM 058° PN, proceed to VALUV.
XARIN 1A	Climb on RWY track to 4.0 DME PLG (at 1000 FT MSL or above). Turn right (MAX IAS 210 KT) to track 095°. Intercept QDM 236° PN, proceed to XARIN.

Remark: 1. After take-off climb to 4000 FT MSL. Unless otherwise specified by ATC.
2. PDG: 6.6%(400 FT/NM) up to 4000 FT MSL due to airspace.

WAYPOINT COORDINATES		
FIX/POINTS	**COORDINATES**	**RADIAL/DISTANCE**
MANUX	55 40 34.3N 022 02 08.2E	KLP R088.1/D27.0 ; PLG D36.3
TIRIN	56 04 02.2N 020 44 52.2E	KLP R315.2/D27.0 ; PLG D13.2
VALUV	55 41 31.7N 020 07 58.7E	KLP R261.7/D37.7 ; PLG D36.0
XARIN	56 12 56.9N 021 58 56.6E	KLP R032.8/D39.1 ; PLG D33.9
KLP	55 42 56.1N 021 14 37.4E	
PN	55 57 23.1N 021 05 13.5E	
PLG	55 57 23.5N 021 05 13.4E	

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYPA AD 2.22

Changes: Procedures courses; radial on waypoints.

©2019 ORO NAVIGACIJA