
STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

TRANSITION ALT 5000

TWR 124.205
118.505
ATIS 129.055

KAUNAS (EYKA) RNAV RWY 08

GOJOM 1A, KAZLA 1A, OTNAV 1A, UGNIS 1A

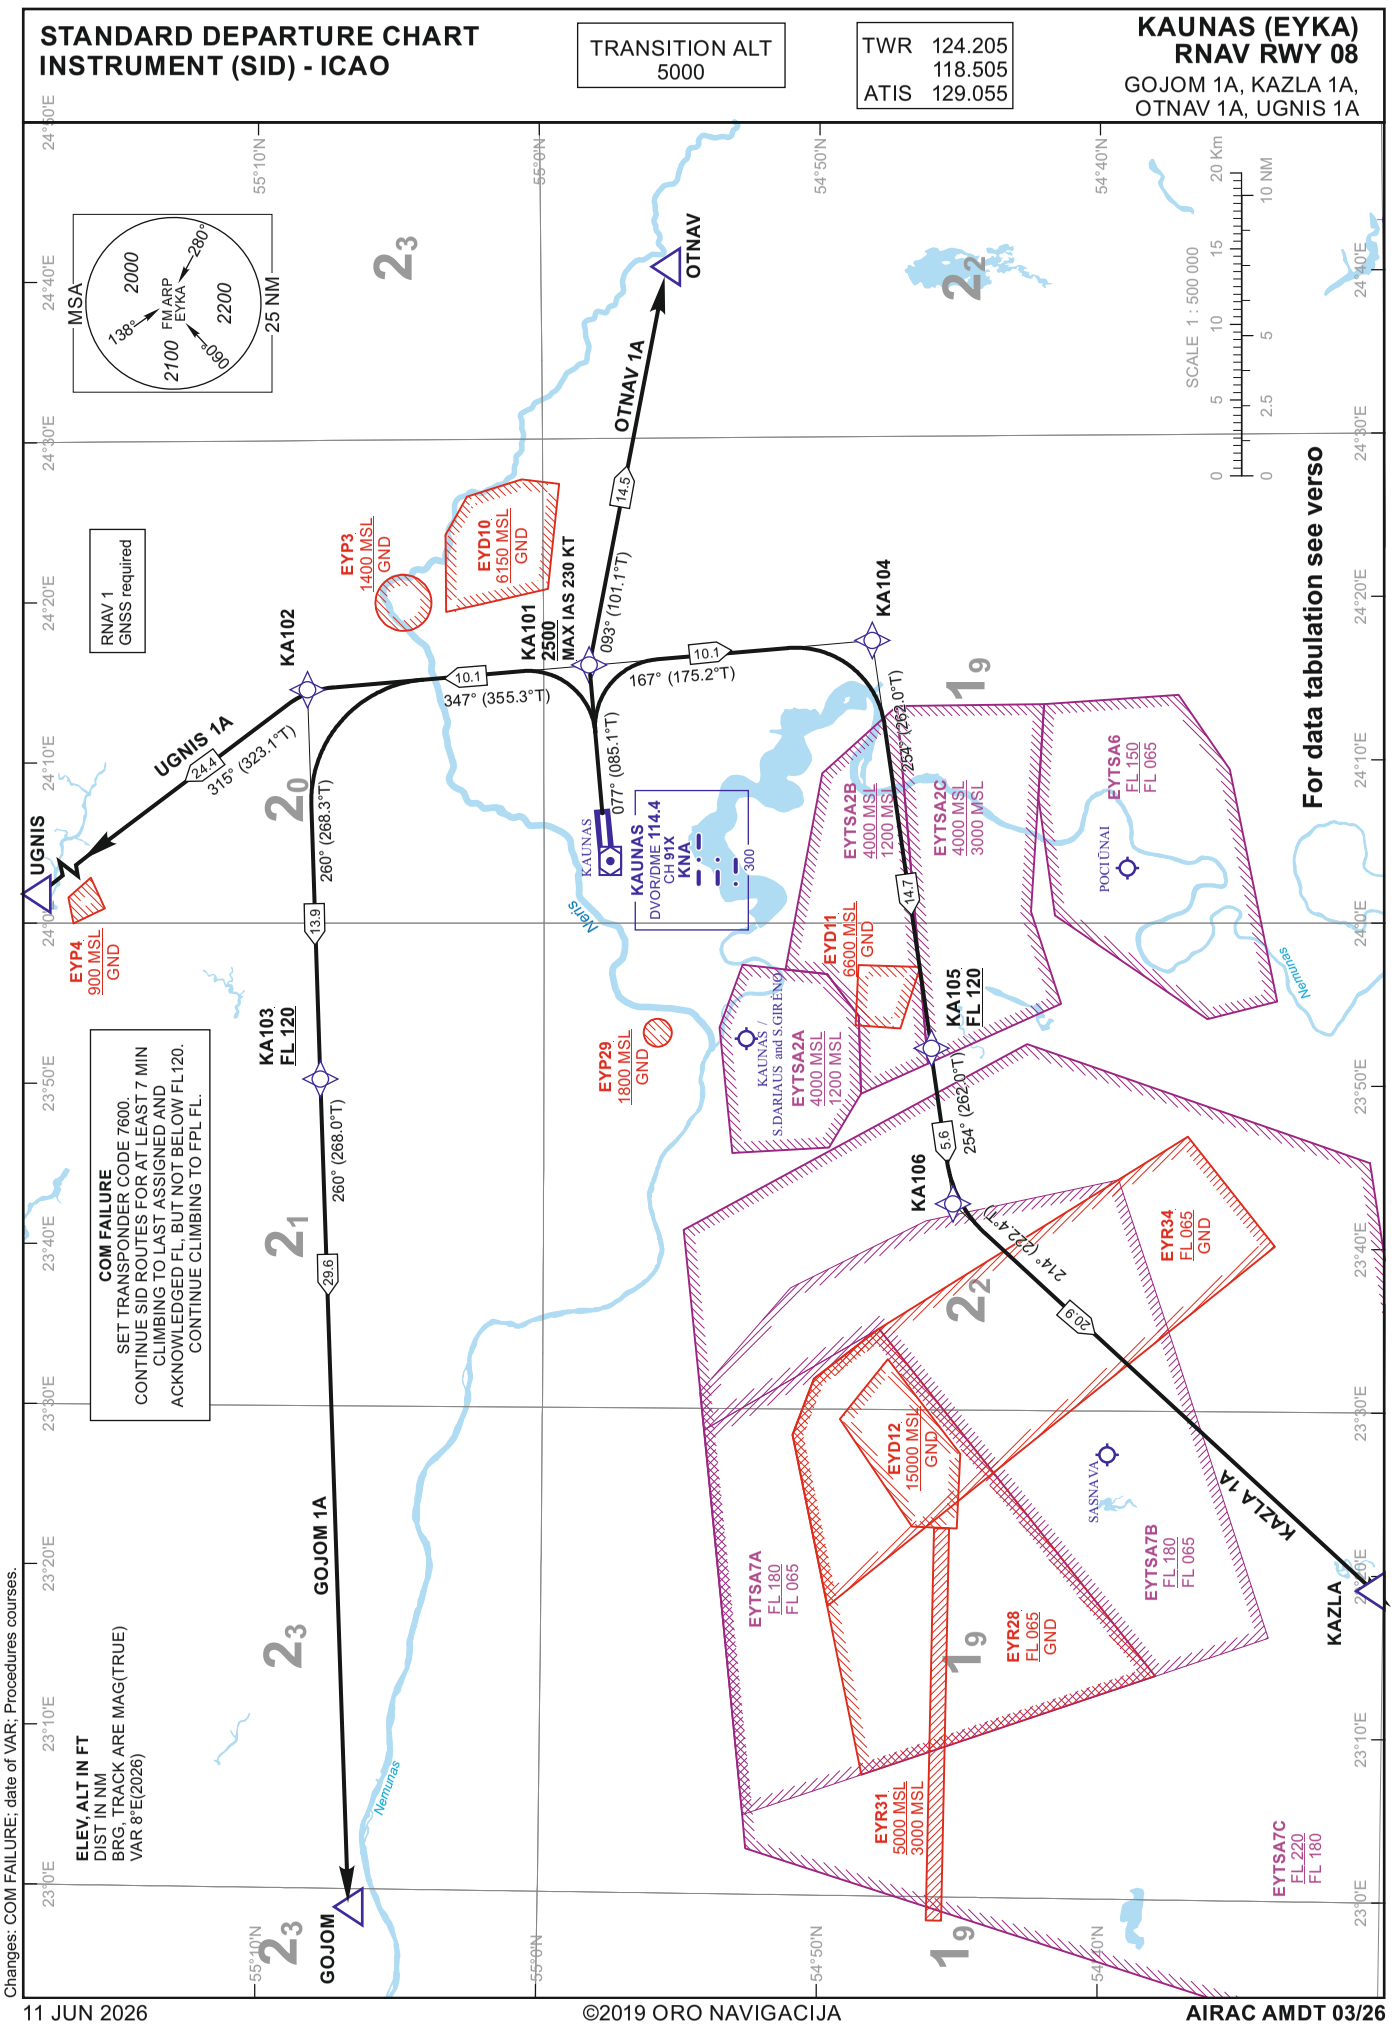

Changes: COM FAILURE; date of VAR; Procedures courses.

©2019 ORO NAVIGACIJA

STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

TRANSITION ALT 5000

KAUNAS (EYKA) RNAV RWY 08

GOJOM 1A, KAZLA 1A, OTNAV 1A,UGNIS 1A

TABULAR DESCRIPTION

GOJOM 1A PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL KA101

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	CF	KA101	—	077(085.1)	8.2	5.3	—	+2500	-230	RNAV1
002	TF	KA102	—	347(355.3)	8.2	10.1	—	—	—	RNAV1
003	TF	KA103	—	260(268.3)	8.2	13.9	—	+FL120	—	RNAV1
004	TF	GOJOM	—	260(268.0)	8.2	29.6	—	—	—	RNAV1

KAZLA 1A PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL KA101

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	CF	KA101	—	077(085.1)	8.2	5.3	—	+2500	-230	RNAV1
002	TF	KA104	—	167(175.2)	8.2	10.1	—	—	—	RNAV1
003	TF	KA105	—	254(262.0)	8.2	14.7	—	+FL120	—	RNAV1
004	TF	KA106	—	254(262.0)	8.2	5.6	—	—	—	RNAV1
005	TF	KAZLA	—	214(222.4)	8.1	20.9	—	—	—	RNAV1

OTNAV 1A PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL KA101

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	CF	KA101	—	077(085.1)	8.2	5.3	—	+2500	-230	RNAV1
002	TF	OTNAV	—	093(101.1)	8.6	14.5	—	—	—	RNAV1

UGNIS 1A PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL KA101

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	CF	KA101	—	077(085.1)	8.2	5.3	—	+2500	-230	RNAV1
002	TF	KA102	—	347(355.3)	8.2	10.1	—	—	—	RNAV1
003	TF	UGNIS	—	315(323.1)	8.5	24.4	—	—	—	RNAV1

WAYPOINT COORDINATES			
FIX/POINTS	**COORDINATES**	**FIX/POINTS**	**COORDINATES**
KA101	54 58 21.9N 024 15 57.4E	**GOJOM**	55 06 43.5N 022 58 51.0E
KA102	55 08 25.0N 024 14 30.9E	**KAZLA**	54 29 59.3N 023 18 33.8E
KA103	55 07 57.6N 023 50 18.0E	**OTNAV**	54 55 33.0N 024 40 36.0E
KA104	54 48 17.1N 024 17 25.3E	**UGNIS**	55 27 50.9N 023 48 44.5E
KA105	54 46 11.9N 023 52 16.7E	**KNA**	54 57 37.4N 024 03 59.1E
KA106	54 45 24.8N 023 42 42.2E		

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYKA AD 2.22

Changes: VAR; Procedures courses.

©2019 ORO NAVIGACIJA