
STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

TRANSITION ALT 5000

TWR 124.305
118.305
ATIS 127.805

PALANGA (EYPA) RNAV RWY 01

CUGLA 1A, TIRIN 1C, UGFOS 1A, UPNAN 1A

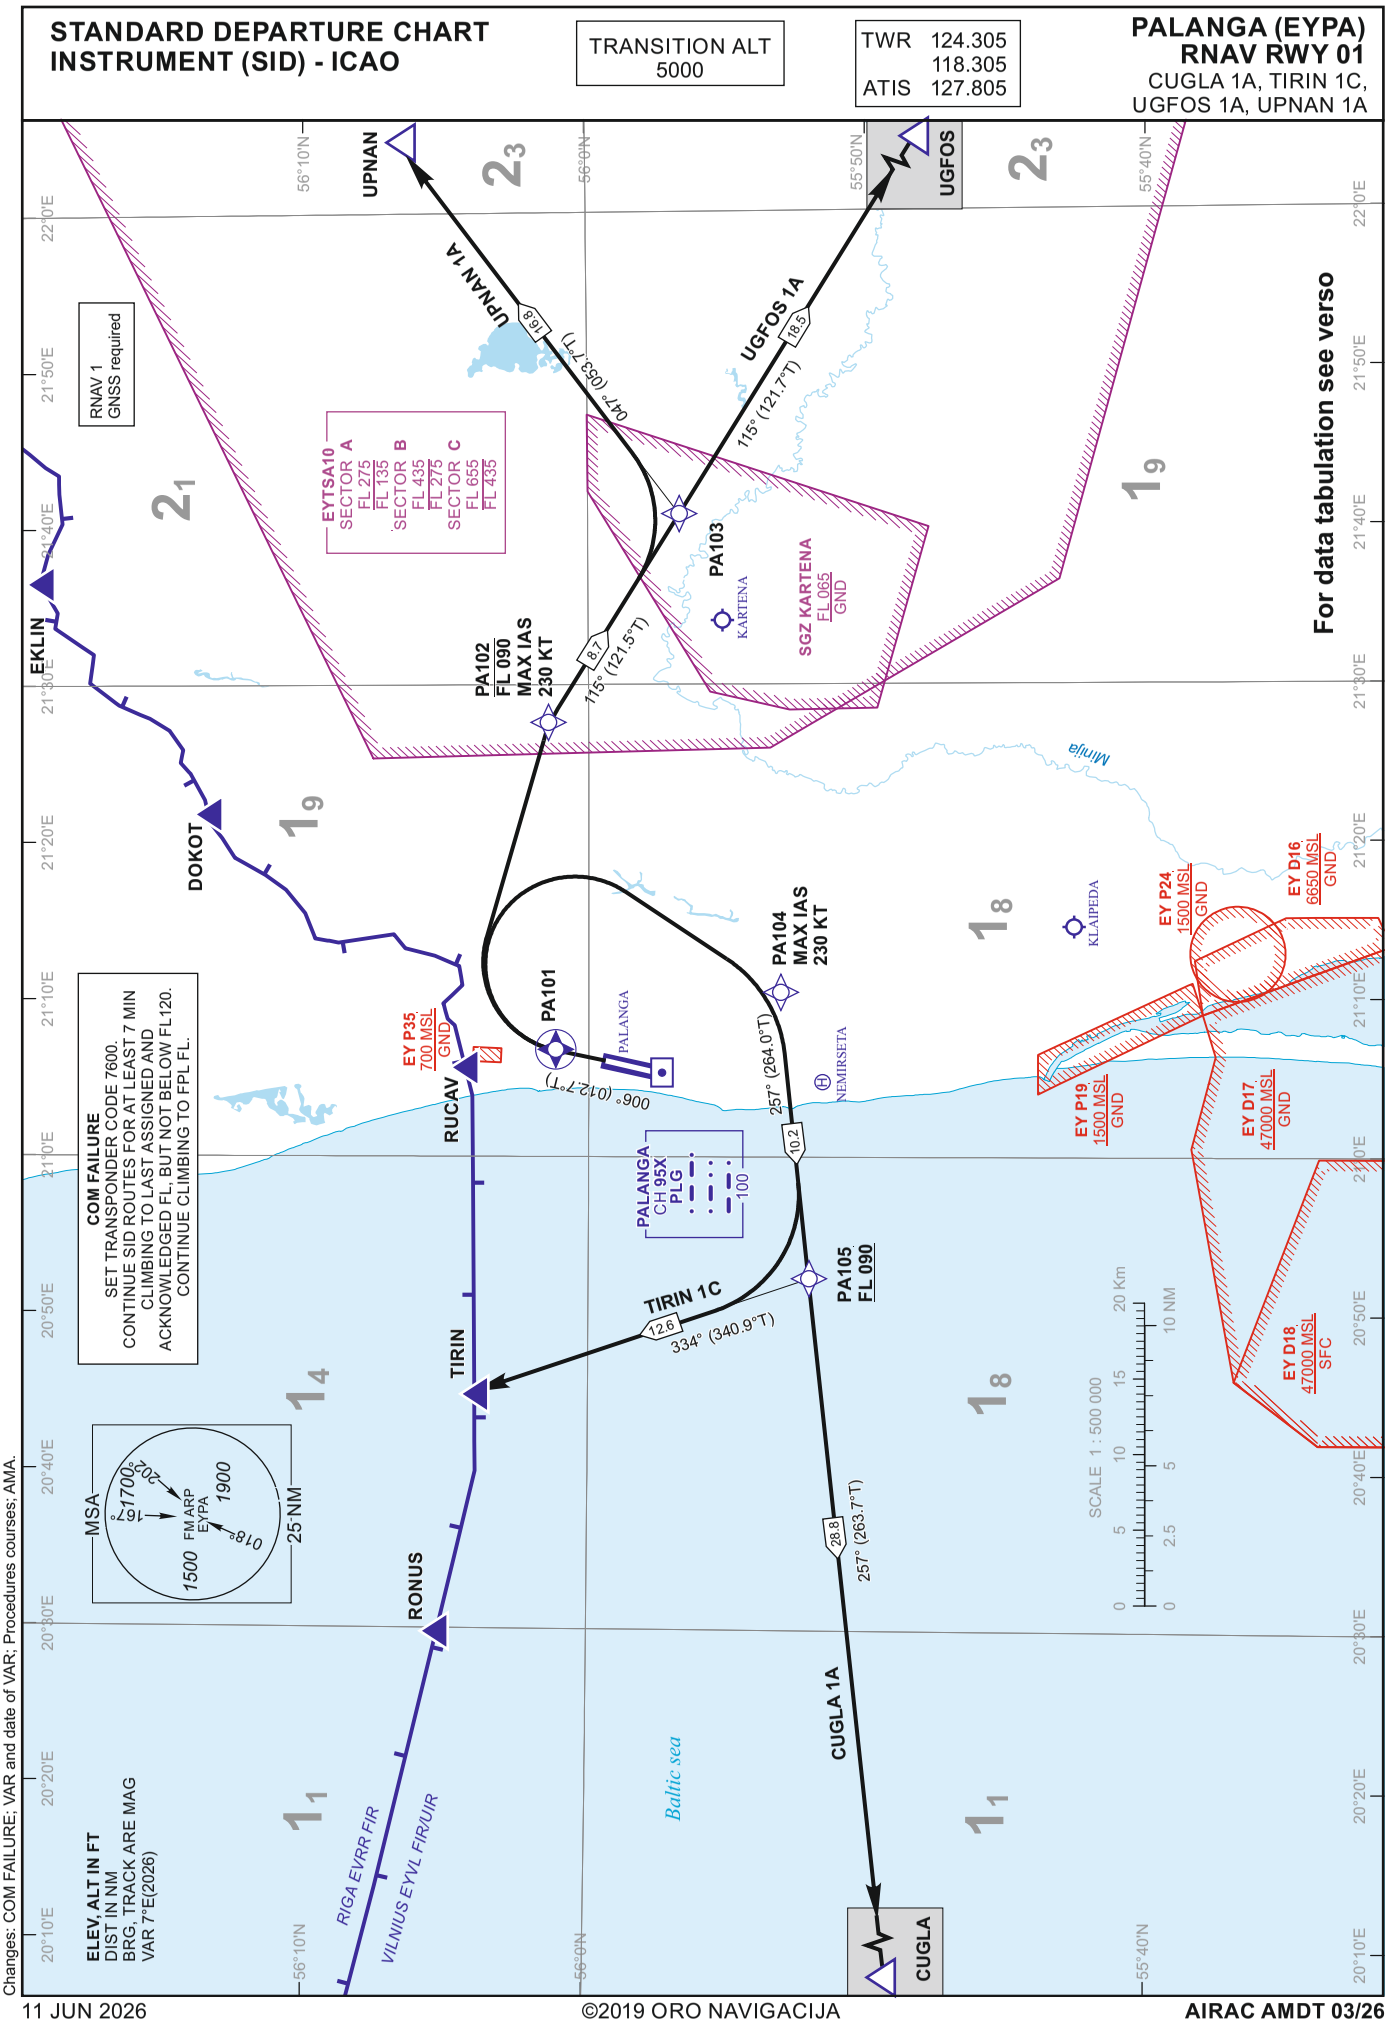

ELEV, ALT IN FT
DIST IN NM
BRG, TRACK ARE MAG
VAR 7°E(2026)

Changes: COM FAILURE; VAR and date of VAR; Procedures courses; AMA.

©2019 ORO NAVIGACIJA

STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

TRANSITION ALT 5000

PALANGA (EYPA) RNAV RWY 01
CUGLA 1A, TIRIN 1C, UGFOS 1A, UPNAN 1A

TABULAR DESCRIPTION

CUGLA 1A PDG 7.7% REQUIRED DUE TO OPERATIONAL REASONS UNTIL PA101

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	CF	PA101	Y	006(012.7)	6.6	2.0	—	—	—	RNAV1
002	DF	PA104	—	—	6.6	—	R	—	-230	RNAV1
003	TF	PA105	—	257(264.0)	6.6	10.2	—	+FL090	—	RNAV1
004	TF	CUGLA	—	257(263.7)	7.5	28.8	—	—	—	RNAV1

TIRIN 1C PDG 7.7% REQUIRED DUE TO OPERATIONAL REASONS UNTIL PA101

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	CF	PA101	Y	006(012.7)	6.6	2.0	—	—	—	RNAV1
002	DF	PA104	—	—	6.6	—	R	—	-230	RNAV1
003	TF	PA105	—	257(264.0)	6.6	10.2	—	+FL090	—	RNAV1
004	TF	TIRIN	—	334(340.9)	6.6	12.6	—	—	—	RNAV1

UGFOS 1A PDG 7.7% REQUIRED DUE TO OPERATIONAL REASONS UNTIL PA101

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	CF	PA101	Y	006(012.7)	6.6	2.0	—	—	—	RNAV1
002	DF	PA102	—	—	6.6	—	R	-FL090	-230	RNAV1
003	TF	PA103	—	115(121.5)	6.6	8.7	—	—	—	RNAV1
004	TF	UGFOS	—	115(121.7)	8.1	18.5	—	—	—	RNAV1

UPNAN 1A PDG 7.7% REQUIRED DUE TO OPERATIONAL REASONS UNTIL PA101

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	CF	PA101	Y	006(012.7)	6.6	2.0	—	—	—	RNAV1
002	DF	PA102	—	—	6.6	—	R	-FL090	-230	RNAV1
003	TF	PA103	—	115(121.5)	6.6	8.7	—	—	—	RNAV1
004	TF	UPNAN	—	047(053.7)	8.2	16.8	—	—	—	RNAV1

WAYPOINT COORDINATES			
FIX/POINTS	**COORDINATES**	**FIX/POINTS**	**COORDINATES**
PA101	56 00 55.9N 021 06 39.3E	**CUGLA**	55 48 48.6N 020 01 29.9E
PA102	56 01 09.3N 021 27 16.5E	**TIRIN**	56 04 02.2N 020 44 52.2E
PA103	55 56 36.3N 021 40 28.1E	**UGFOS**	55 46 52.0N 022 08 18.7E
PA104	55 53 12.6N 021 10 17.1E	**UPNAN**	56 06 27.9N 022 04 35.9E
PA105	55 52 07.8N 020 52 14.3E	**PLG**	55 57 23.5N 021 05 13.4E

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYPA AD 2.22

Changes: VAR; Procedures courses.

©2019 ORO NAVIGACIJA