
# STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

TRANSITION ALT 5000

| | |
|---|---|
| TWR | 124.305 |
| | 118.305 |
| ATIS | 127.805 |

## PALANGA RWY 01

MANUX 1A, TIRIN 1A, VALUV 1A, XARIN 1A

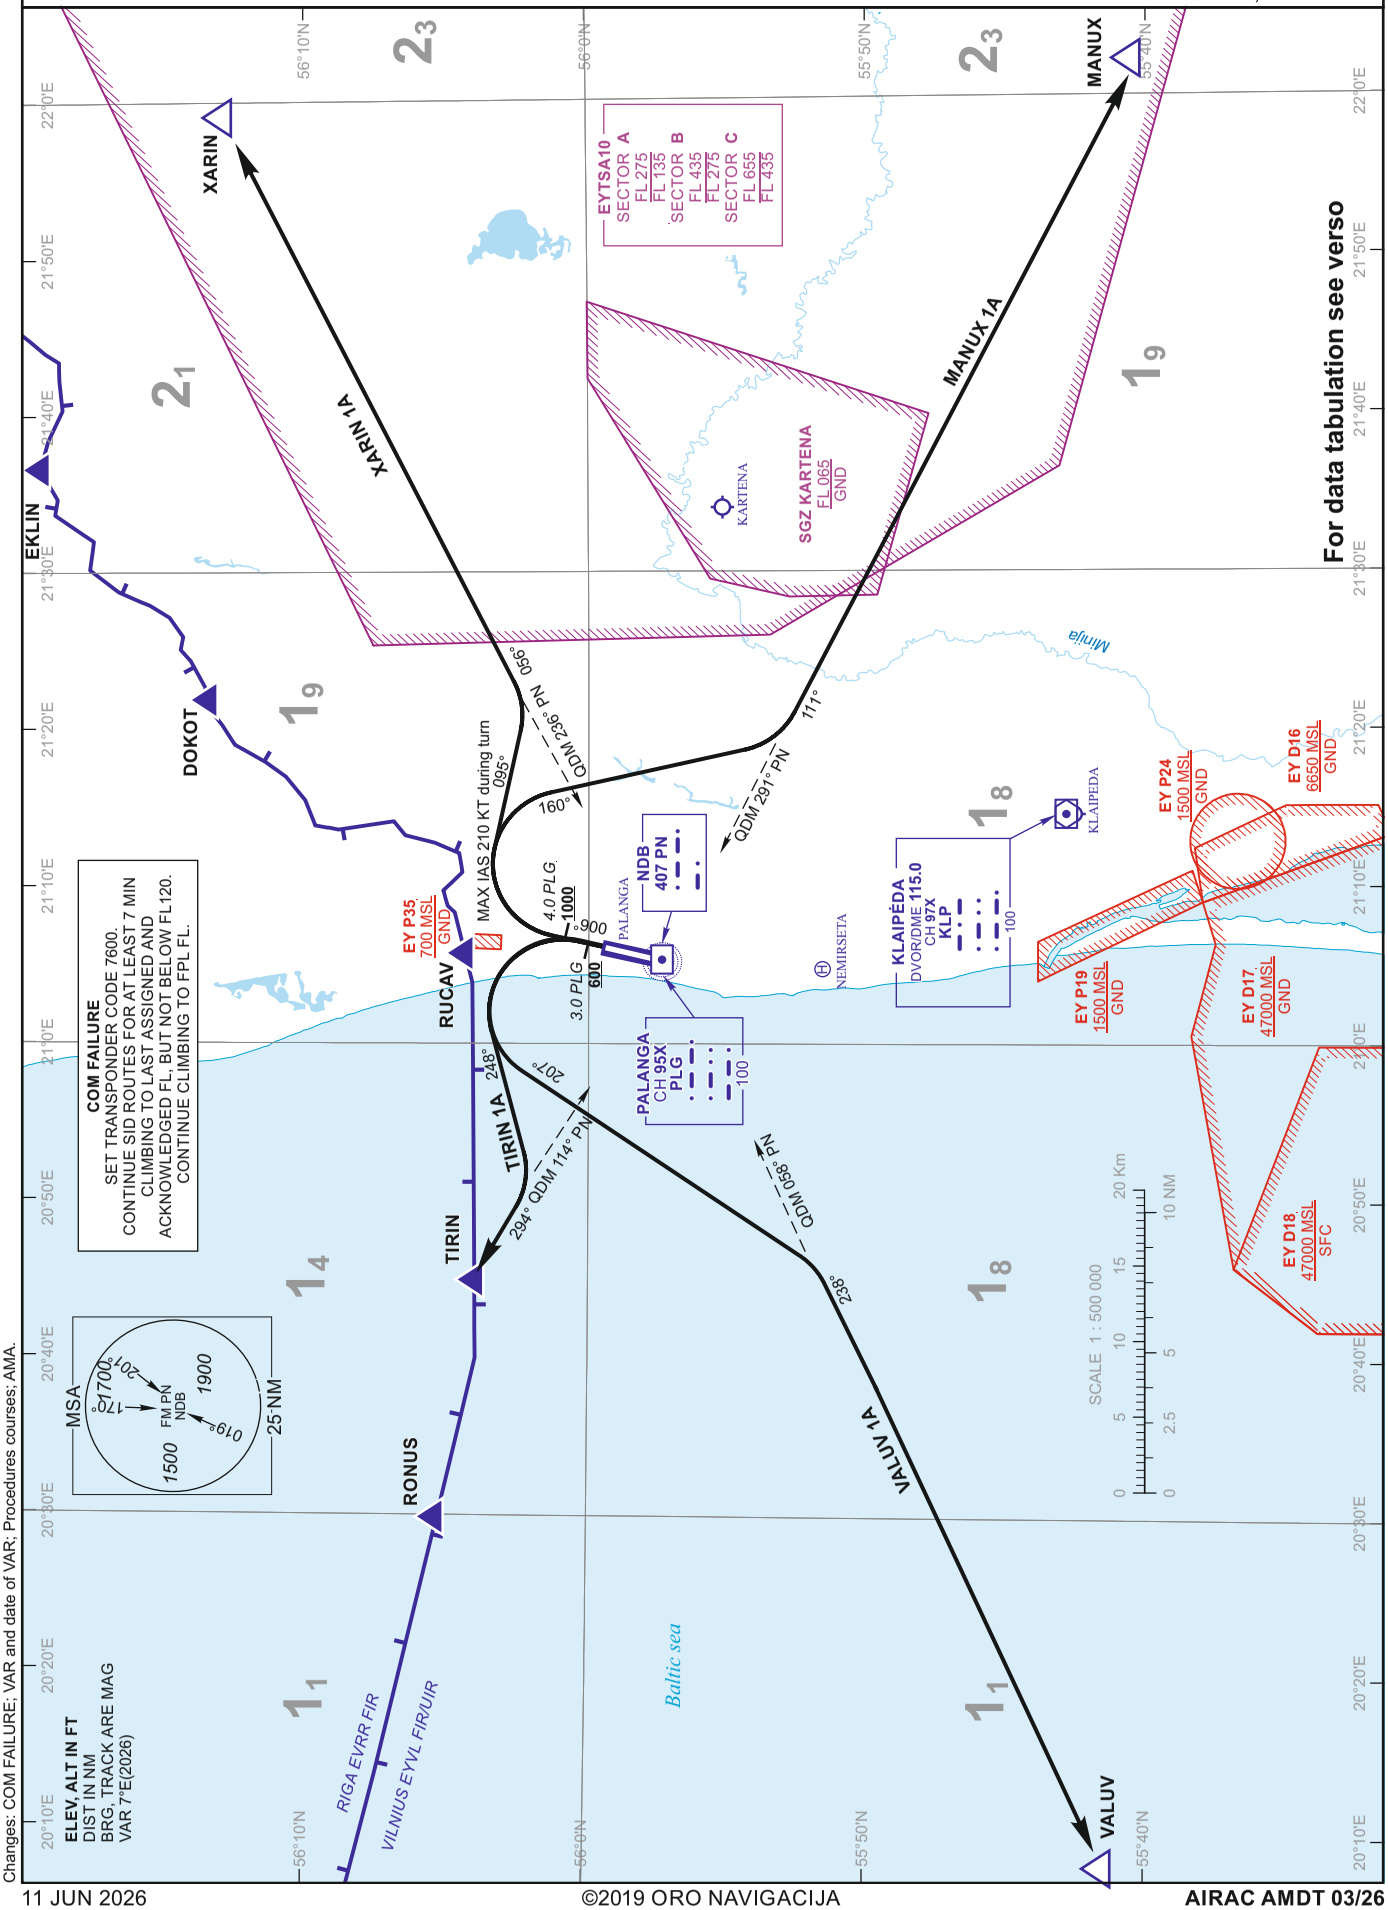


ELEV, ALT IN FT
DIST IN NM
BRG, TRACK ARE MAG
VAR 7°E(2026)

Changes: COM FAILURE; VAR and date of VAR; Procedures courses; AMA.



©2019 ORO NAVIGACIJA

# PALANGA
# SID RWY 01

## TABULAR DESCRIPTION

**STANDARD INSTRUMENT DEPARTURE (SID) ROUTES**

| SID NAME | ROUTE |
|---|---|
| **MANUX 1A** | Climb on RWY track to 4.0 DME PLG (at 1000 FT MSL or above). Turn right (MAX IAS 210 KT) to track 160°. Intercept QDM 291° PN, proceed to MANUX. |
| **TIRIN 1A** | Climb on RWY track to 3.0 DME PLG (at 600 FT MSL or above). Turn left (MAX IAS 210 KT) to track 248°. Intercept QDM 114° PN, proceed to TIRIN. |
| **VALUV 1A** | Climb on RWY track to 3.0 DME PLG (at 600 FT MSL or above). Turn left (MAX IAS 210 KT) to track 207°. Intercept QDM 058° PN, proceed to VALUV. |
| **XARIN 1A** | Climb on RWY track to 4.0 DME PLG (at 1000 FT MSL or above). Turn right (MAX IAS 210 KT) to track 095°. Intercept QDM 236° PN, proceed to XARIN. |

Remark: 1. After take-off climb to 4000 FT MSL. Unless otherwise specified by ATC.
2. PDG: 6.6%(400 FT/NM) up to 4000 FT MSL due to airspace.

| WAYPOINT COORDINATES | | |
|---|---|---|
| **FIX/POINTS** | **COORDINATES** | **RADIAL/DISTANCE** |
| **MANUX** | 55 40 34.3N 022 02 08.2E | KLP R088.1/D27.0 ; PLG D36.3 |
| **TIRIN** | 56 04 02.2N 020 44 52.2E | KLP R315.2/D27.0 ; PLG D13.2 |
| **VALUV** | 55 41 31.7N 020 07 58.7E | KLP R261.7/D37.7 ; PLG D36.0 |
| **XARIN** | 56 12 56.9N 021 58 56.6E | KLP R032.8/D39.1 ; PLG D33.9 |
| **KLP** | 55 42 56.1N 021 14 37.4E | |
| **PN** | 55 57 23.1N 021 05 13.5E | |
| **PLG** | 55 57 23.5N 021 05 13.4E | |

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYPA AD 2.22

Changes: Procedures courses; radial on waypoints.


©2019 ORO NAVIGACIJA