
Changes: COM FAILURE; VAR and date of VAR; Procedures courses; AMA.

STANDARD ARRIVAL CHART INSTRUMENT (STAR) - ICAO

PALANGA (EYPA) RNAV RWY 19

MANUX 2B, TIRIN 2B, VALUV 2B, XARIN 2B

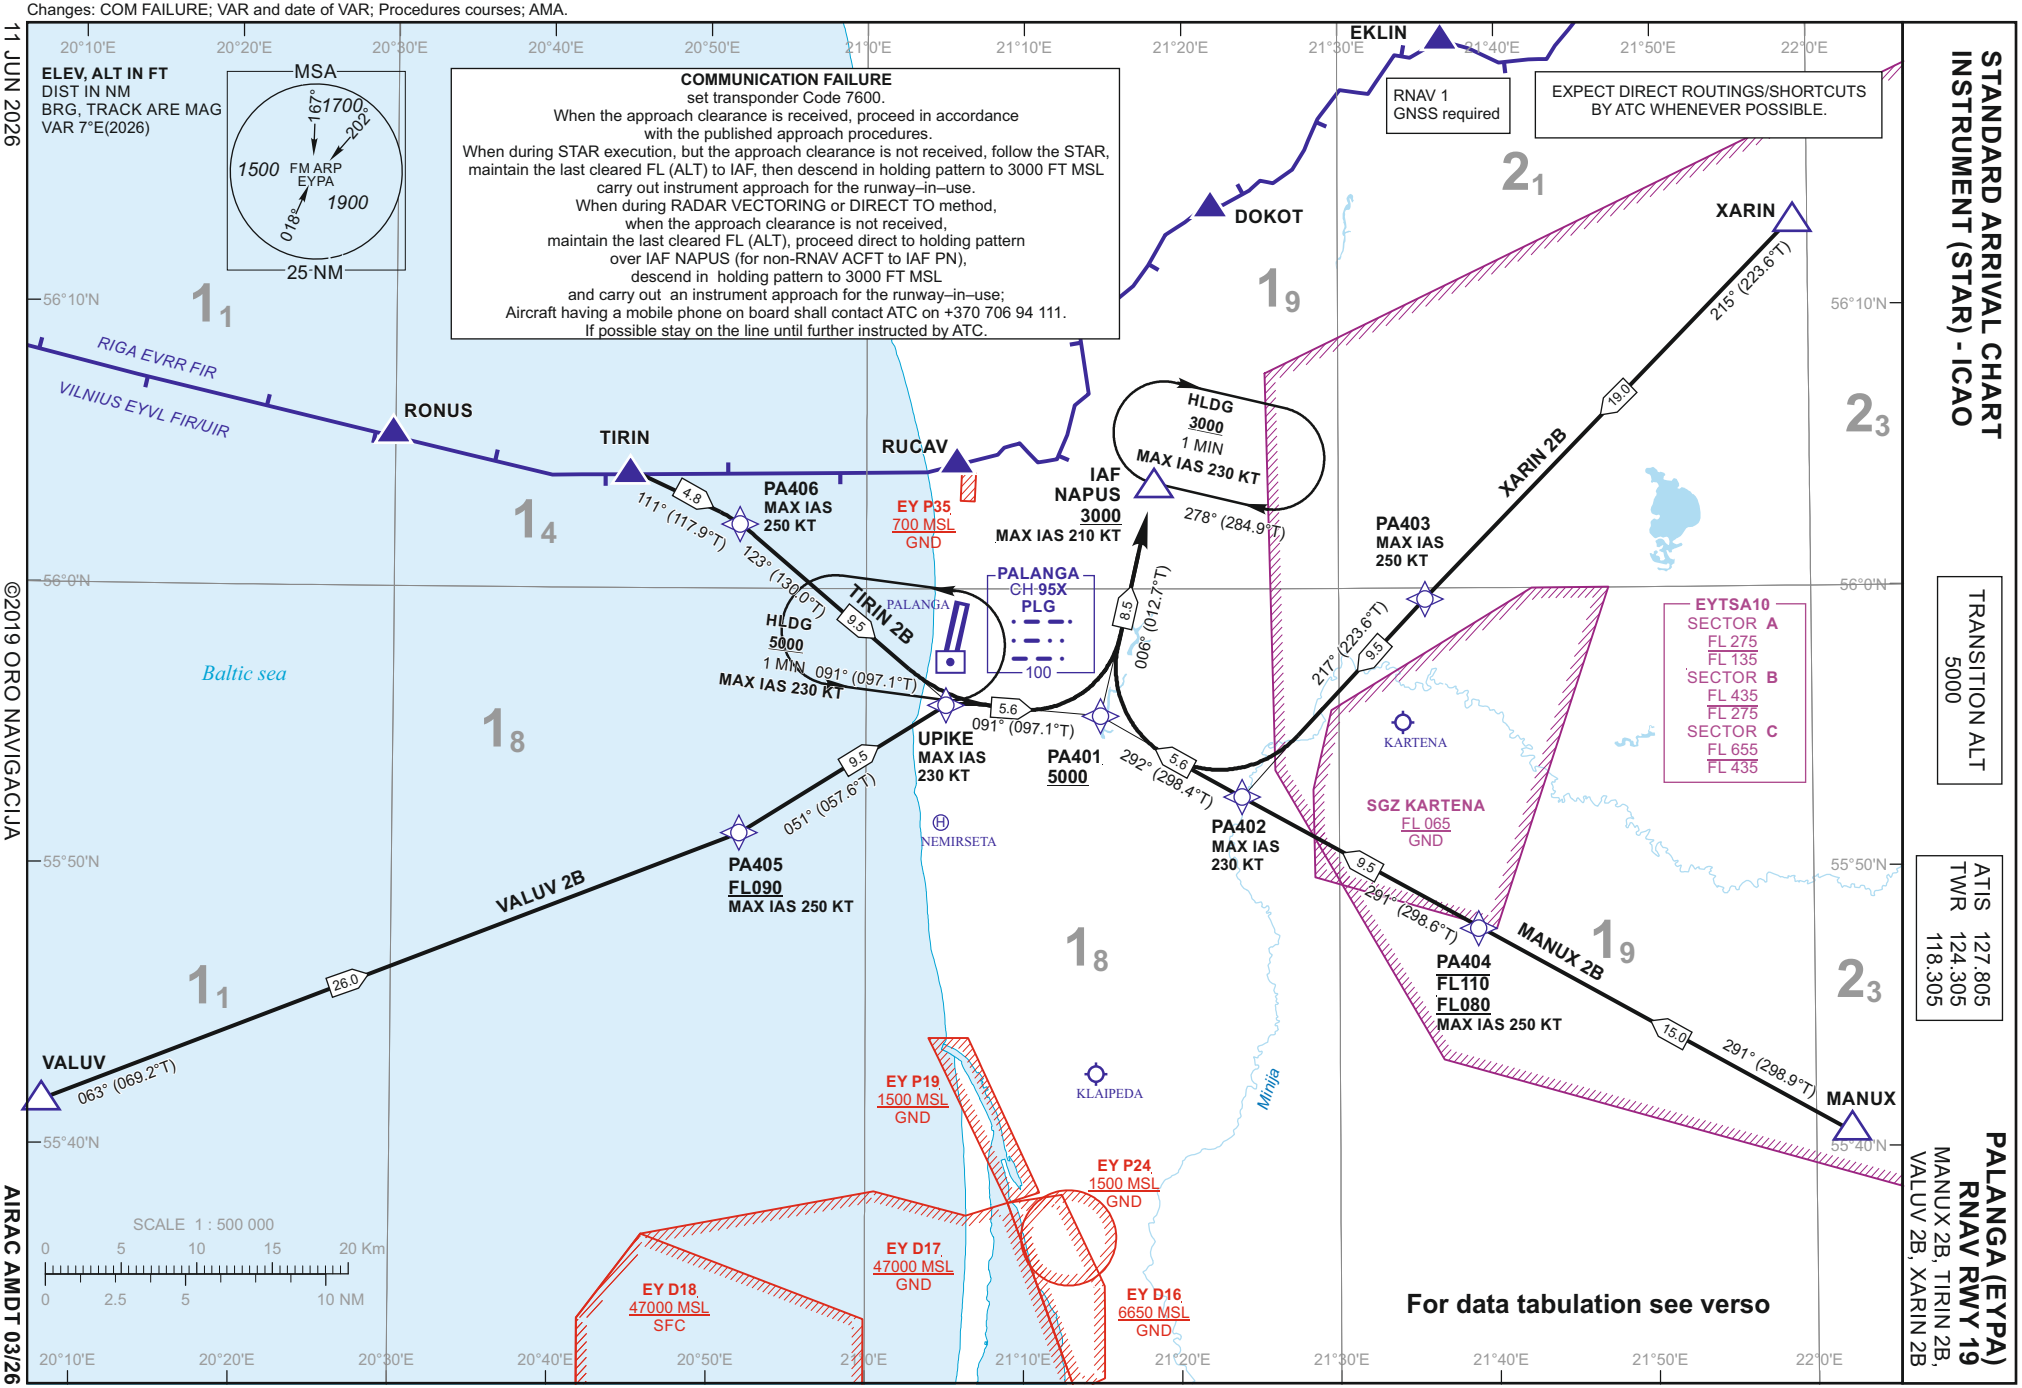

TRANSITION ALT 5000

ATIS 127.805
TWR 124.305
118.305

11 JUN 2026

©2019 ORO NAVIGACIJA

AIRAC AMDT 03/26

STANDARD ARRIVAL CHART INSTRUMENT (STAR) - ICAO

TRANSITION ALT 5000

PALANGA (EYPA) RNAV RWY 19
MANUX 2B, TIRIN 2B, VALUV 2B, XARIN 2B

TABULAR DESCRIPTION

MANUX 2B

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)/ Time	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	IF	MANUX	—	—	8.1	—	—	—	—	RNAV1
002	TF	PA404	—	291(298.9)	8.0	15.0	—	-FL110/+FL080	-250	RNAV1
003	TF	PA402	—	291(298.6)	6.6	9.5	—	—	-230	RNAV1
004	TF	PA401	—	292(298.4)	6.6	5.6	—	+5000	—	RNAV1
005	TF	NAPUS	—	006(012.7)	6.6	8.5	—	+3000	-210	RNAV1

TIRIN 2B

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)/ Time	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	IF	TIRIN	—	—	6.6	—	—	—	—	RNAV1
002	TF	PA406	—	111(117.9)	6.6	4.8	—	—	-250	RNAV1
003	TF	UPIKE	—	123(130.0)	6.6	9.5	—	—	-230	RNAV1
004	TF	PA401	—	091(097.1)	6.6	5.6	—	+5000	—	RNAV1
005	TF	NAPUS	—	006(012.7)	6.6	8.5	—	+3000	-210	RNAV1

VALUV 2B

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)/ Time	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	IF	VALUV	—	—	7.5	—	—	—	—	RNAV1
002	TF	PA405	—	063(069.2)	6.6	26.0	—	+FL090	-250	RNAV1
003	TF	UPIKE	—	051(057.6)	6.6	9.5	—	—	-230	RNAV1
004	TF	PA401	—	091(097.1)	6.6	5.6	—	+5000	—	RNAV1
005	TF	NAPUS	—	006(012.7)	6.6	8.5	—	+3000	-210	RNAV1

XARIN 2B

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)/ Time	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	IF	XARIN	—	—	8.2	—	—	—	—	RNAV1
002	TF	PA403	—	215(223.6)	6.6	19.0	—	—	-250	RNAV1
003	TF	PA402	—	217(223.6)	6.6	9.5	—	—	-230	RNAV1
004	TF	PA401	—	292(298.4)	6.6	5.6	—	+5000	—	RNAV1
005	TF	NAPUS	—	006(012.7)	6.6	8.5	—	+3000	-210	RNAV1

HOLDINGS INDENTIFICATION

Holding fix	Geographical coordinates	Inbound track °M(°T)	Magnetic Variation	Outbound distance (NM)/ Time	Turn Direction	Minimum/Maximum holding altitude (FT)/Flight level	Speed (KT)
NAPUS	56 03 12.1N 021 18 32.7E	278(284.9)	6.6	1 min	R	+3000	-230
UPIKE	55 55 40.5N 021 05 23.3E	091(097.1)	6.6	1 min	L	+5000	-230

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYPA AD 2.22

Changes: VAR; Procedures courses.

©2019 ORO NAVIGACIJA

STANDARD ARRIVAL CHART INSTRUMENT (STAR) - ICAO

TRANSITION ALT 5000

PALANGA (EYPA) RNAV RWY 19
MANUX 2B, TIRIN 2B, VALUV 2B, XARIN 2B

TABULAR DESCRIPTION

WAYPOINT COORDINATES					
FIX/POINTS	**COORDINATES**	**FIX/POINTS**	**COORDINATES**	**FIX/POINTS**	**COORDINATES**
PA401	55 54 58.5N 021 15 14.2E	**PA406**	56 01 48.3N 020 52 24.1E	**VALUV**	55 41 31.7N 020 07 58.7E
PA402	55 52 18.9N 021 24 00.0E	**MANUX**	55 40 34.3N 022 02 08.2E	**XARIN**	56 12 56.9N 021 58 56.6E
PA403	55 59 09.2N 021 35 34.0E	**NAPUS**	56 03 12.1N 021 18 32.7E	**PLG**	55 57 23.5N 021 05 13.4E
PA404	55 47 46.2N 021 38 52.4E	**TIRIN**	56 04 02.2N 020 44 52.2E		
PA405	55 50 36.6N 020 51 07.8E	**UPIKE**	55 55 40.5N 021 05 23.3E		

Changes:

©2019 ORO NAVIGACIJA