
Changes: COM FAILURE.

16 APR 2026

STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

VILNIUS (EYVI) RNAV RWY 19

ATMEZ 1B, DUKAT 1B, ELEKA 1B, LAFAT 1B, SOGBI 1B, UPASI 1B

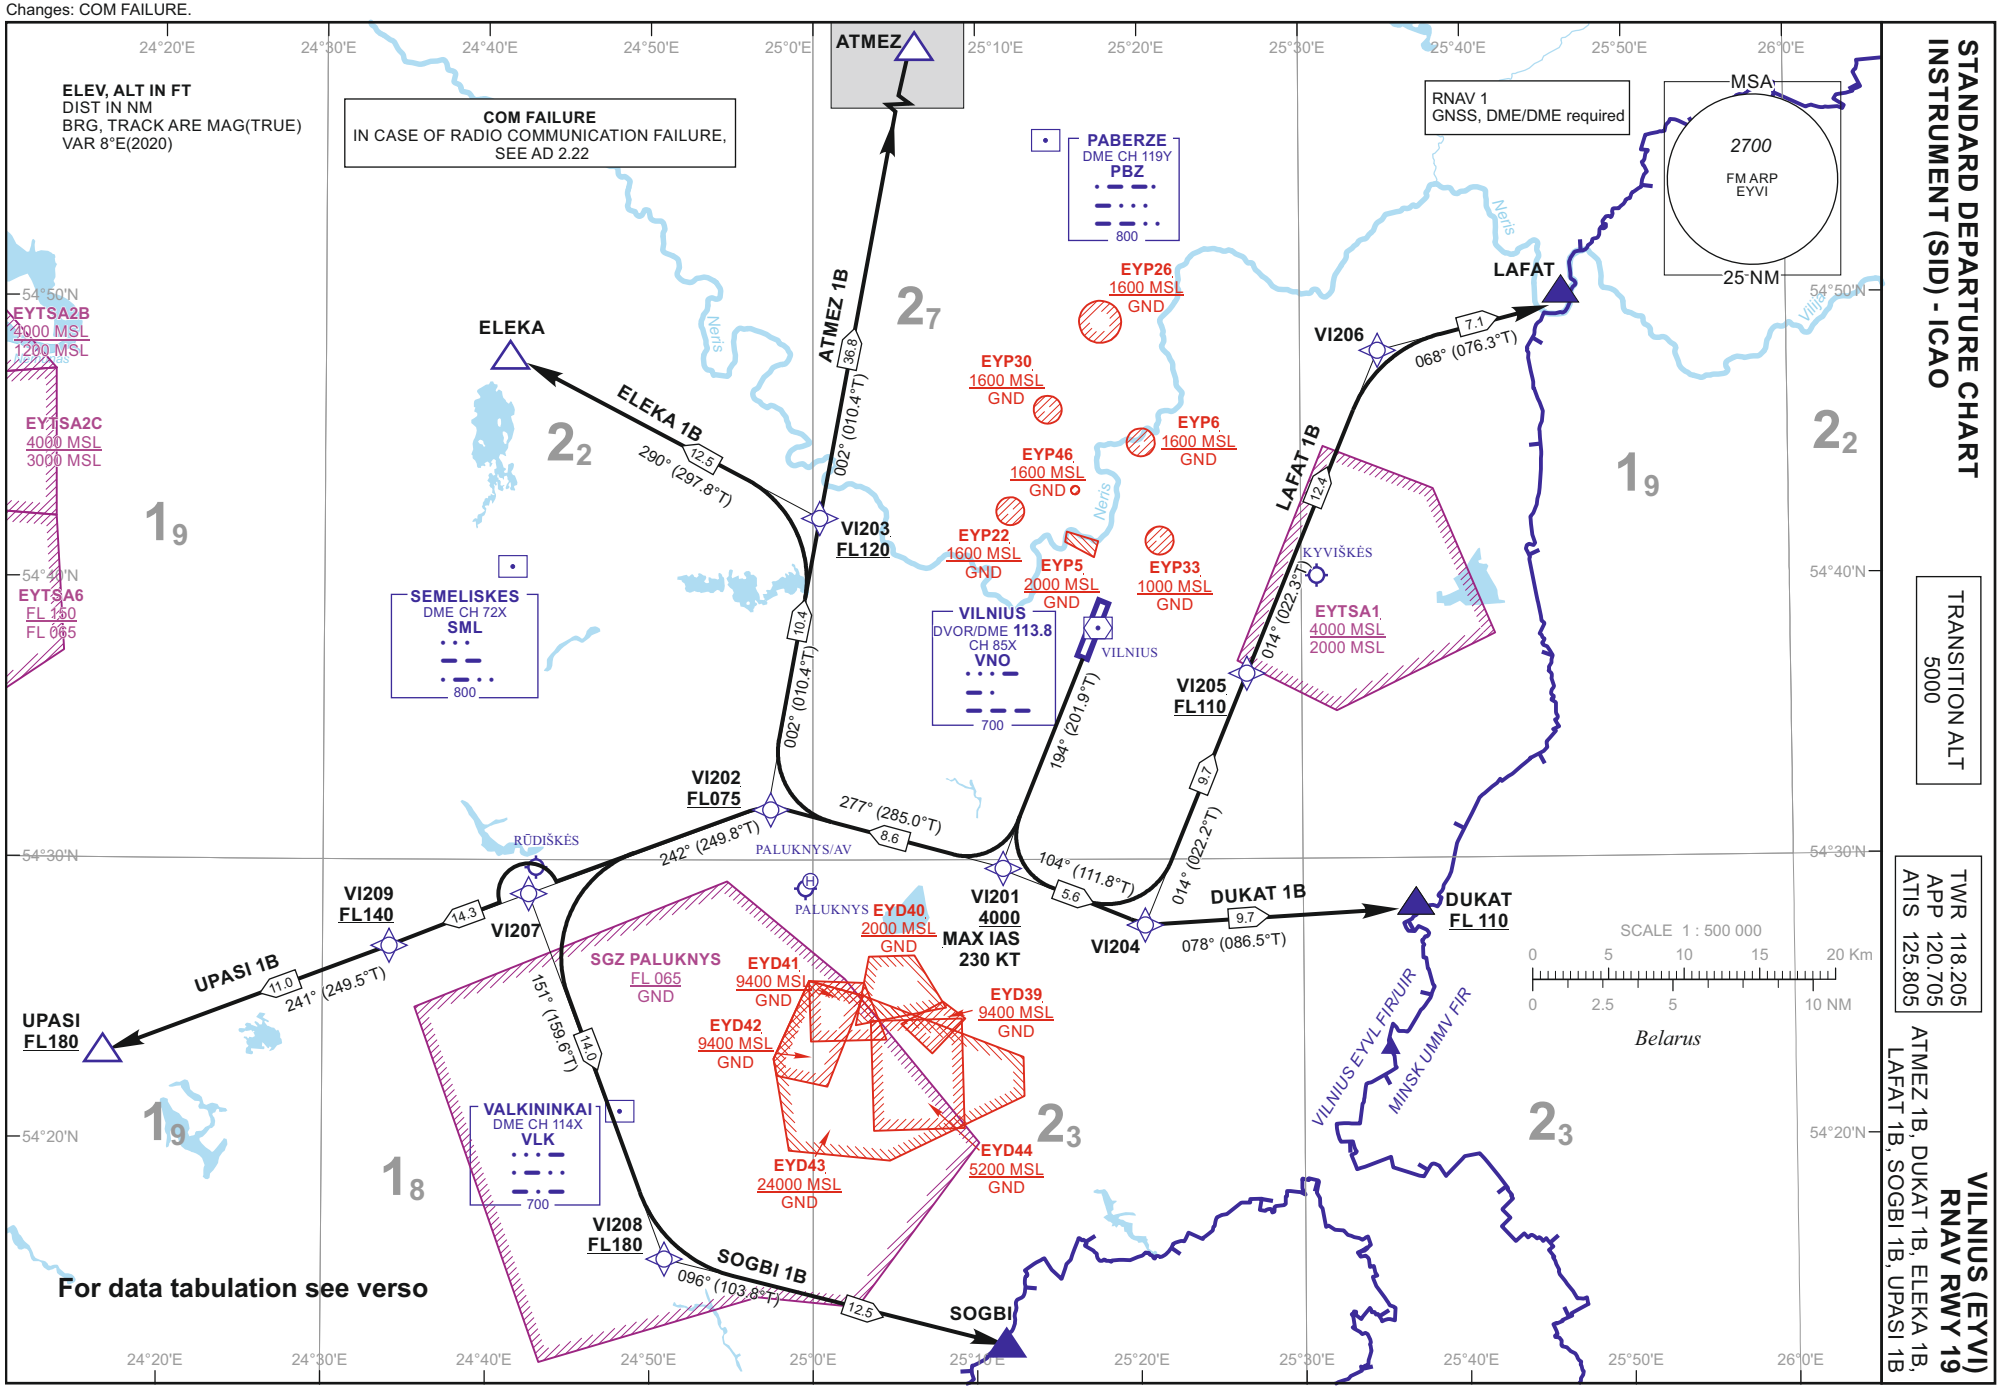

©2019 ORO NAVIGACIJA

AIRAC AMDT 02/26

STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

TRANSITION ALT 5000

VILNIUS (EYVI) RNAV RWY 19

ATMEZ 1B, DUKAT 1B, ELEKA 1B, LAFAT 1B, SOGBI 1B, UPASI 1B

TABULAR DESCRIPTION

ATMEZ 1B PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VI201

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	CF	VI201	—	194(201.9)	8.3	8.0	—	+4000	-230	RNAV1
002	TF	VI202	—	277(285.0)	8.3	8.6	—	+FL075	—	RNAV1
003	TF	VI203	—	002(010.4)	8.3	10.4	—	+FL120	—	RNAV1
004	TF	ATMEZ	—	002(010.4)	8.3	36.8	—	—	—	RNAV1

DUKAT 1B PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VI201

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	CF	VI201	—	194(201.9)	8.3	8.0	—	+4000	-230	RNAV1
002	TF	VI204	—	104(111.8)	8.3	5.6	—	—	—	RNAV1
003	TF	DUKAT	—	078(086.5)	8.3	9.7	—	+FL110	—	RNAV1

ELEKA 1B PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VI201

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	CF	VI201	—	194(201.9)	8.3	8.0	—	+4000	-230	RNAV1
002	TF	VI202	—	277(285.0)	8.3	8.6	—	+FL075	—	RNAV1
003	TF	VI203	—	002(010.4)	8.3	10.4	—	+FL120	—	RNAV1
004	TF	ELEKA	—	290(297.8)	8.3	12.5	—	—	—	RNAV1

LAFAT 1B PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VI201

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	CF	VI201	—	194(201.9)	8.3	8.0	—	+4000	-230	RNAV1
002	TF	VI204	—	104(111.8)	8.3	5.6	—	—	—	RNAV1
003	TF	VI205	—	014(022.2)	8.3	9.7	—	+FL110	—	RNAV1
004	TF	VI206	—	014(022.3)	8.3	12.4	—	—	—	RNAV1
005	TF	LAFAT	—	068(076.3)	8.3	7.1	—	—	—	RNAV1

SOGBI 1B PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VI201

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	CF	VI201	—	194(201.9)	8.3	8.0	—	+4000	-230	RNAV1
002	TF	VI202	—	277(285.0)	8.3	8.6	—	+FL075	—	RNAV1
003	TF	VI207	—	242(249.8)	8.3	9.0	—	—	—	RNAV1
004	TF	VI208	—	151(159.6)	8.3	14.0	—	+FL180	—	RNAV1
005	TF	SOGBI	—	096(103.8)	8.3	12.5	—	—	—	RNAV1

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYVI AD 2.22

Changes: SID ATMEZ 1B added.

©2019 ORO NAVIGACIJA

STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

TRANSITION ALT 5000

VILNIUS (EYVI) RNAV RWY 19

ATMEZ 1B, DUKAT 1B, ELEKA 1B, LAFAT 1B, SOGBI 1B, UPASI 1B

TABULAR DESCRIPTION

UPASI 1B PDG 7.0% REQUIRED DUE TO OPERATIONAL REASONS UNTIL VI201

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	CF	VI201	—	194(201.9)	8.3	8.0	—	+4000	-230	RNAV1
002	TF	VI202	—	277(285.0)	8.3	8.6	—	+FL075	—	RNAV1
003	TF	VI209	—	242(249.8)	8.3	14.3	—	+FL140	—	RNAV1
004	TF	UPASI	—	241(249.5)	8.3	11.0	—	+FL180	—	RNAV1

Passing 2500 FT MSL contact with Vilnius APP Channel 120.705

WAYPOINT COORDINATES			
FIX/POINTS	**COORDINATES**	**FIX/POINTS**	**COORDINATES**
VI201	54 29 48.5N 025 11 27.2E	**ATMEZ**	55 18 20.9N 025 12 04.7E
VI202	54 32 01.0N 024 57 11.3E	**DUKAT**	54 28 17.3N 025 36 55.2E
VI203	54 42 13.8N 025 00 25.2E	**ELEKA**	54 48 01.6N 024 41 20.1E
VI204	54 27 43.3N 025 20 21.8E	**LAFAT**	54 49 52.0N 025 46 43.0E
VI205	54 36 41.4N 025 26 39.2E	**SOGBI**	54 12 47.0N 025 11 45.0E
VI206	54 48 10.6N 025 34 46.6E	**UPASI**	54 23 12.1N 024 16 37.3E
VI207	54 28 54.2N 024 42 42.7E	**PBZ**	54 55 38.0N 025 14 23.0E
VI208	54 15 48.2N 024 51 01.3E	**SML**	54 40 31.2N 024 41 32.4E
VI209	54 27 03.5N 024 34 12.1E	**VLK**	54 21 02.9N 024 48 13.2E
		VNO	54 38 09.8N 025 17 37.1E

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYVI AD 2.22

Changes: REP ATMEZ instead VI107; REP TAGOL and SID TAGOL 1B withdrawn.

©2019 ORO NAVIGACIJA