Changes: COM FAILURE.

16 APR 2026


STANDARD ARRIVAL CHART INSTRUMENT (STAR) - ICAO

TRANSITION ALT 5000

ATIS 125.805
APP 120.705
TWR 118.205

VILNIUS (EYVI) RNAV RWY 01

DIMTA 2A, DUKAT 2A, IRKAL 2A, LAFAT 2A, PIFBO 2A, OTNAV 2A, SOGBI 2A

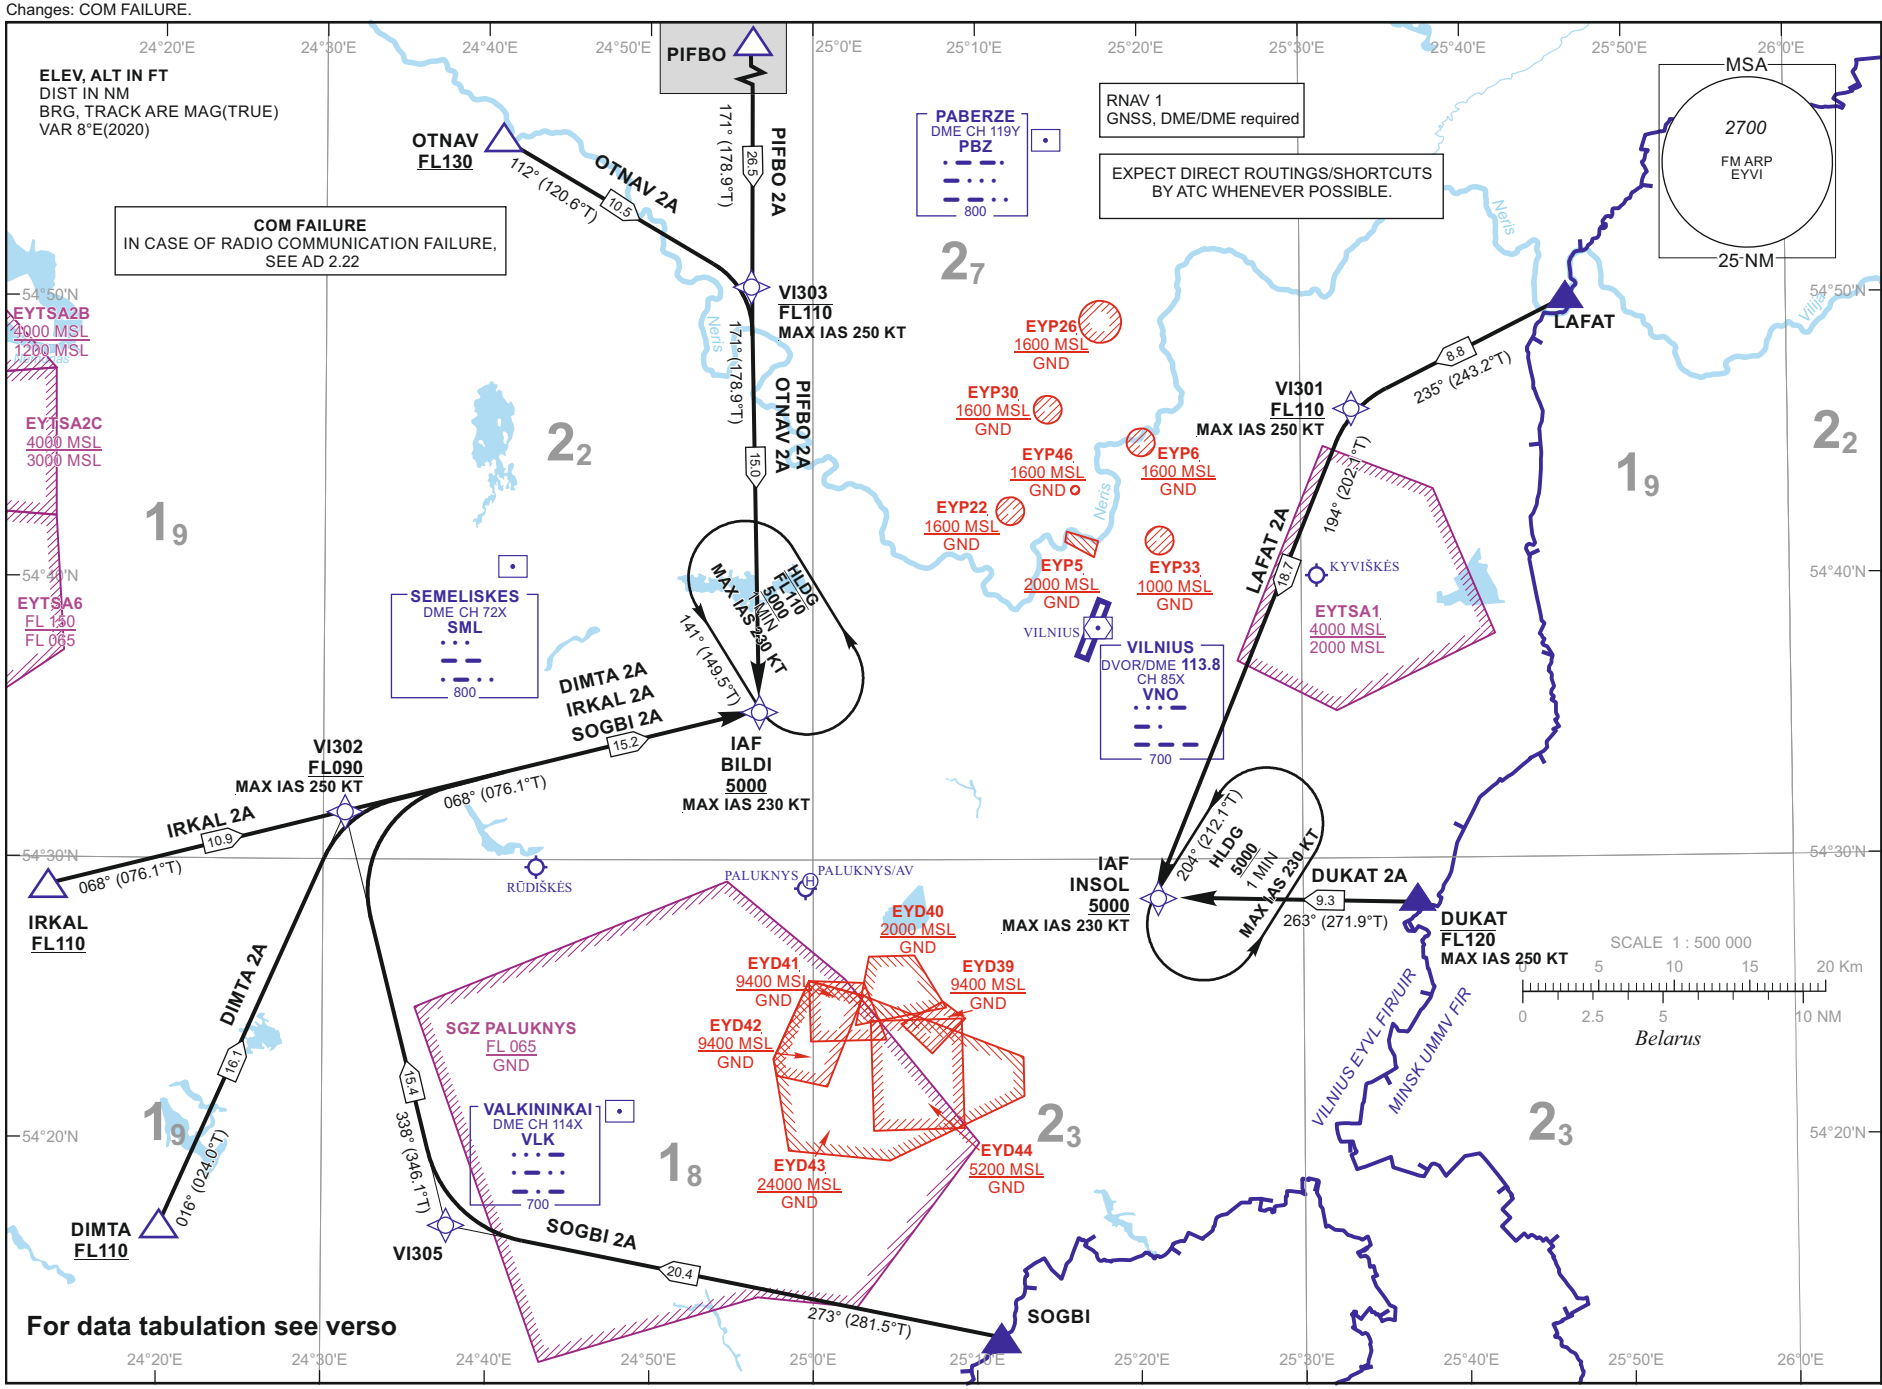

©2019 ORO NAVIGACIJA

STANDARD ARRIVAL CHART INSTRUMENT (STAR) - ICAO

TRANSITION ALT 5000

VILNIUS (EYVI) RNAV RWY 01

DIMTA 2A, DUKAT 2A, IRKAL 2A, LAFAT 2A, PIFBO 2A, OTNAV 2A, SOGBI 2A

TABULAR DESCRIPTION

DIMTA 2A

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)/ Time*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	IF	DIMTA	—	—	8.2	—	—	+FL110	—	RNAV1
002	TF	VI302	—	016(024.0)	8.2	16.1	—	+FL090	-250	RNAV1
003	TF	BILDI	—	068(076.1)	8.3	15.2	—	+5000	-230	RNAV1

DUKAT 2A

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)/ Time*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	IF	DUKAT	—	—	8.6	—	—	-FL120	-250	RNAV1
002	TF	INSOL	—	263(271.9)	8.3	9.3	—	+5000	-230	RNAV1

IRKAL 2A

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)/ Time*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	IF	IRKAL	—	—	8.2	—	—	+FL110	—	RNAV1
002	TF	VI302	—	068(076.1)	8.2	10.9	—	+FL090	-250	RNAV1
003	TF	BILDI	—	068(076.1)	8.3	15.2	—	+5000	-230	RNAV1

LAFAT 2A

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)/ Time*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	IF	LAFAT	—	—	8.7	—	—	—	—	RNAV1
002	TF	VI301	—	235(243.2)	8.7	8.8	—	+FL110	-250	RNAV1
003	TF	INSOL	—	194(202.1)	8.3	18.7	—	+5000	-230	RNAV1

PIFBO 2A

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)/ Time*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	TF	PIFBO	—	—	8.7	—	—	—	—	RNAV1
002	TF	VI303	—	171(178.9)	8.4	26.5	—	-FL110	-250	RNAV1
003	TF	BILDI	—	171(178.9)	8.3	15.0	—	+5000	-230	RNAV1

OTNAV 2A

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)/ Time*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	IF	OTNAV	—	—	8.4	—	—	+FL130	—	RNAV1
002	TF	VI303	—	112(120.6)	8.4	10.5	—	-FL110	-250	RNAV1
003	TF	BILDI	—	171(178.9)	8.3	15.0	—	+5000	-230	RNAV1

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYVI AD 2.22

Changes: STAR MURUN 2A withdrawn; STAR PIFBO 2A added.

©2019 ORO NAVIGACIJA

STANDARD ARRIVAL CHART INSTRUMENT (STAR) - ICAO

TRANSITION ALT 5000

VILNIUS (EYVI)
RNAV RWY 01
DIMTA 2A, DUKAT 2A, IRKAL 2A, LAFAT 2A, PIFBO 2A, OTNAV 2A, SOGBI 2A

TABULAR DESCRIPTION

SOGBI 2A

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)/ Time*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	IF	SOGBI	—	—	8.4	—	—	—	—	RNAV1
002	TF	VI305	—	273(281.5)	8.2	20.4	—	—	—	RNAV1
003	TF	VI302	—	338(346.1)	8.2	15.4	—	+FL090	-250	RNAV1
004	TF	BILDI	—	068(076.1)	8.3	15.2	—	+5000	-230	RNAV1

HOLDINGS INDENTIFICATION

Holding fix	*Geographical coordinates*	*Inbound track °M(°T)*	*Magnetic Variation*	*Outbound distance (NM)/ Time*	*Turn Direction*	*Minimum/Maximum holding altitude (FT)/Flight level*	*Speed (KT)*
BILDI	54 35 16.4N 024 56 43.1E	141(149.5)	8.3	1 min	L	+5000 / -FL110	-230
INSOL	54 28 37.0N 025 21 03.5E	204(212.1)	8.3	1 min	L	+5000	-230

WAYPOINT COORDINATES

FIX/POINTS	COORDINATES	FIX/POINTS	COORDINATES
VI301	54 45 55.5N 025 33 08.0E	**IRKAL**	54 29 02.4N 024 13 11.9E
VI302	54 31 40.5N 024 31 20.4E	**LAFAT**	54 49 52.0N 025 46 43.0E
VI303	54 50 15.0N 024 56 12.8E	**PIFBO**	55 16 42.2N 024 55 18.6E
VI305	54 16 45.6N 024 37 41.8E	**OTNAV**	54 55 33.0N 024 40 36.0E
		SOGBI	54 12 47.0N 025 11 45.0E
BILDI	54 35 16.4N 024 56 43.1E	**PBZ**	54 55 38.0N 025 14 23.0E
DIMTA	54 16 57.1N 024 20 08.9E	**SML**	54 40 31.2N 024 41 32.4E
DUKAT	54 28 17.3N 025 36 55.2E	**VLK**	54 21 02.9N 024 48 13.2E
INSOL	54 28 37.0N 025 21 03.5E	**VNO**	54 38 09.8N 025 17 37.1E

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYVI AD 2.22

Changes: REP PIFBO instead VI304; REP MURUN withdrawn.

©2019 ORO NAVIGACIJA