Changes: COM FAILURE.

16 APR 2026


STANDARD ARRIVAL CHART INSTRUMENT (STAR) - ICAO

TRANSITION ALT 5000

ATIS 125.805
APP 120.705
TWR 118.205

VILNIUS (EYVI) RNAV RWY 19

DIMTA 2B, DUKAT 2B, IRKAL 2B, LAFAT 2B, PIFBO 2B, OTNAV 2B, SOGBI 2B

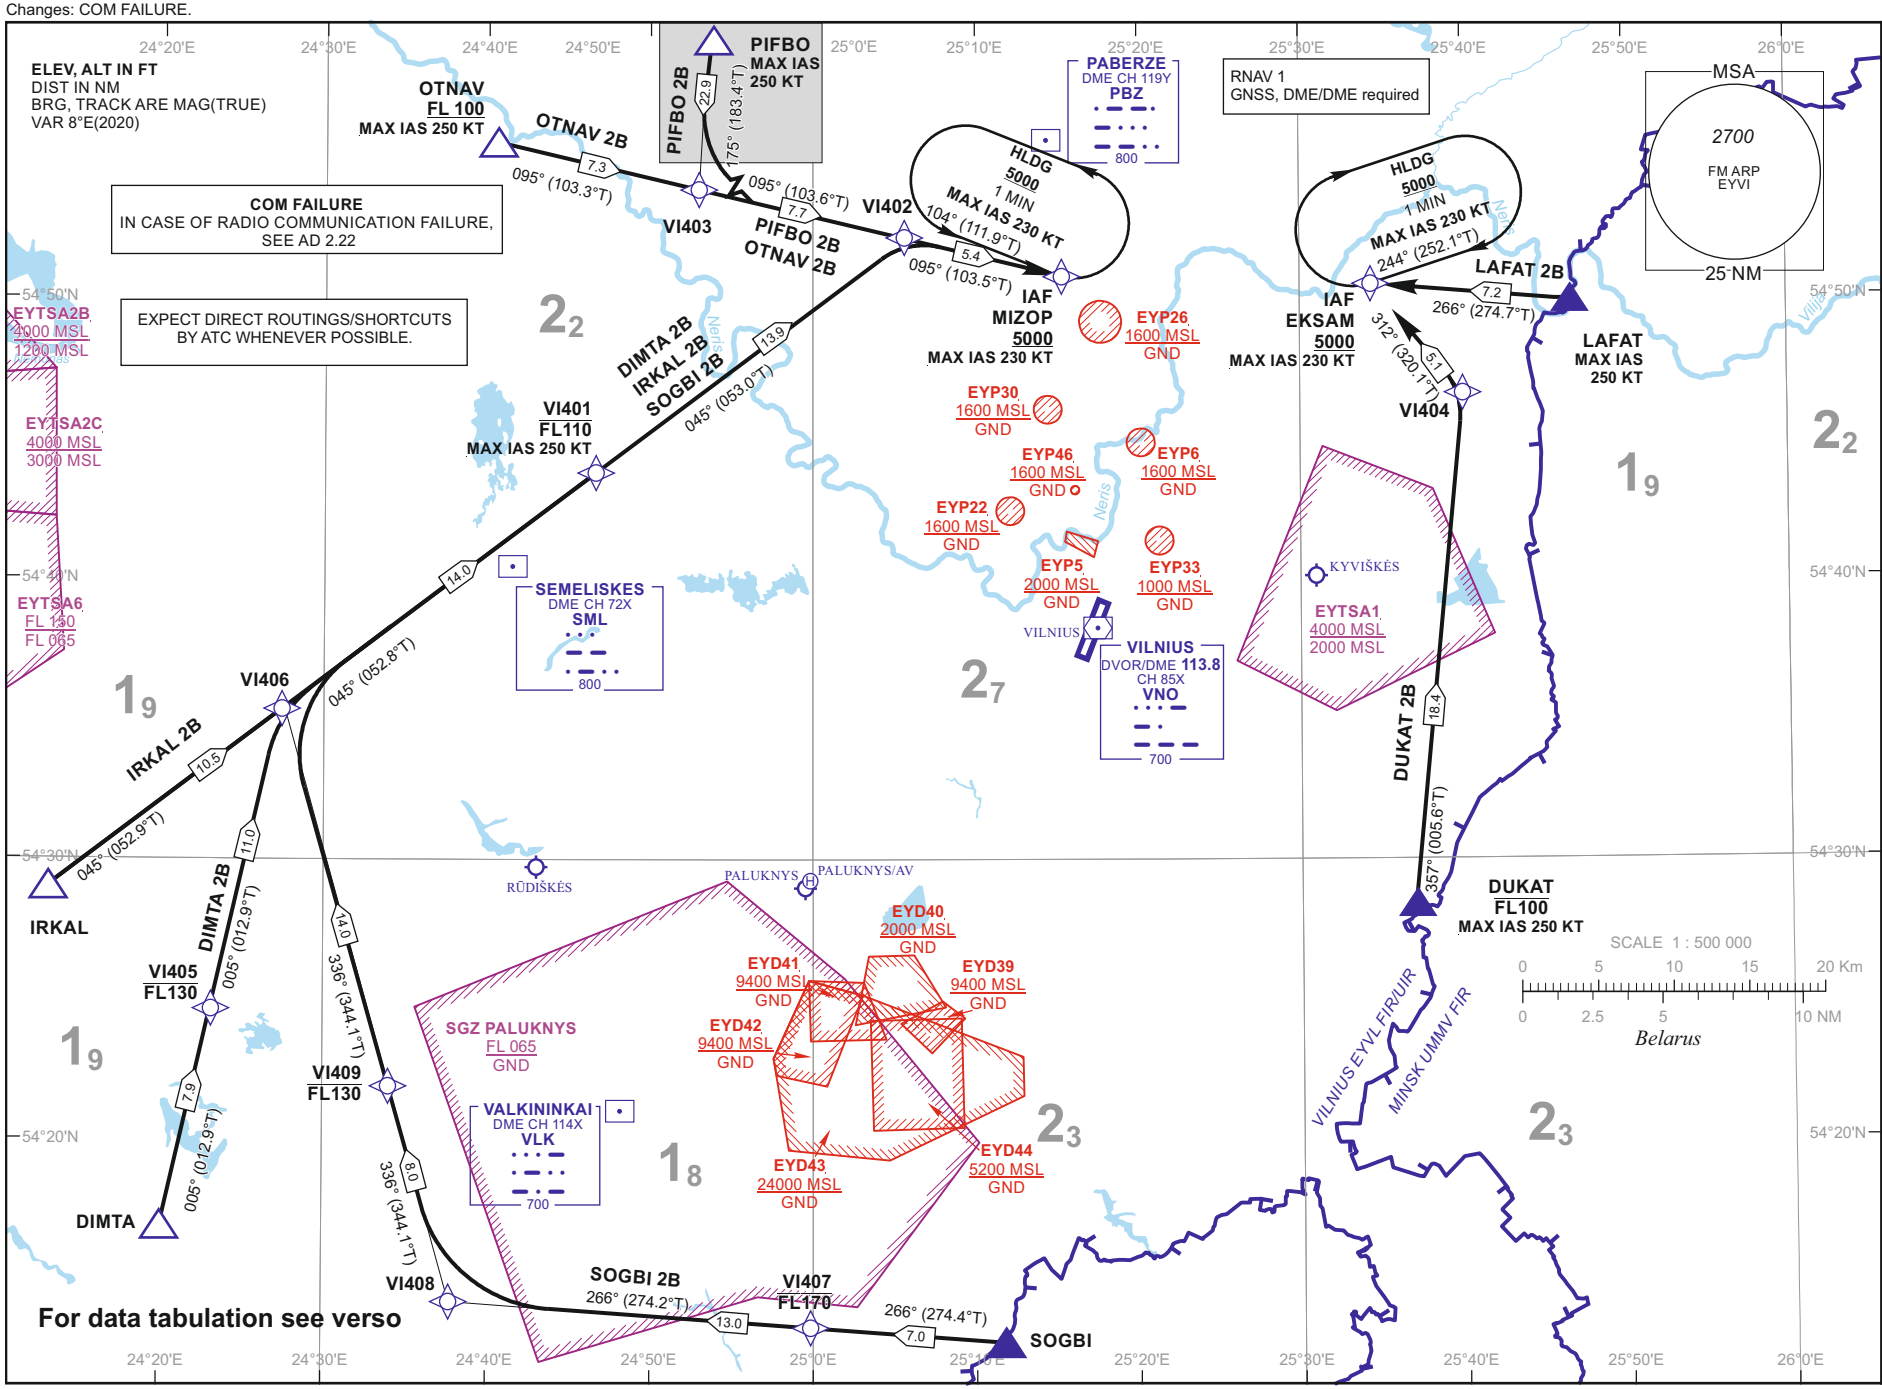

©2019 ORO NAVIGACIJA

STANDARD ARRIVAL CHART INSTRUMENT (STAR) - ICAO

TRANSITION ALT 5000

VILNIUS (EYVI) RNAV RWY 19

DIMTA 2B, DUKAT 2B, IRKAL 2B, LAFAT 2B, PIFBO 2B, OTNAV 2B, SOGBI 2B

TABULAR DESCRIPTION

DIMTA 2B

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)/ Time	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	IF	DIMTA	—	—	8.2	—	—	—	—	RNAV1
002	TF	VI405	—	005(012.9)	8.2	7.9	—	-FL130	—	RNAV1
003	TF	VI406	—	005(012.9)	8.2	11.0	—	—	—	RNAV1
004	TF	VI401	—	045(052.8)	8.2	14.0	—	-FL110	-250	RNAV1
005	TF	VI402	—	045(053.0)	8.3	13.9	—	—	—	RNAV1
006	TF	MIZOP	—	095(103.5)	8.3	5.4	—	+5000	-230	RNAV1

DUKAT 2B

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)/ Time	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	IF	DUKAT	—	—	8.6	—	—	-FL100	-250	RNAV1
002	TF	VI404	—	357(005.6)	8.6	18.4	—	—	—	RNAV1
003	TF	EKSAM	—	312(320.1)	8.3	5.1	—	+5000	-230	RNAV1

IRKAL 2B

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)/ Time	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	IF	IRKAL	—	—	8.2	—	—	—	—	RNAV1
002	TF	VI406	—	045(052.9)	8.2	10.5	—	—	—	RNAV1
003	TF	VI401	—	045(052.8)	8.2	14.0	—	-FL110	-250	RNAV1
004	TF	VI402	—	045(053.0)	8.3	13.9	—	—	—	RNAV1
005	TF	MIZOP	—	095(103.5)	8.3	5.4	—	+5000	-230	RNAV1

LAFAT 2B

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)/ Time	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	IF	LAFAT	—	—	8.7	—	—	—	-250	RNAV1
002	TF	EKSAM	—	266(274.7)	8.3	7.2	—	+5000	-230	RNAV1

PIFBO 2B

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)/ Time	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	Navigation Specification
001	TF	PIFBO	—	—	8.7	—	—	—	-250	RNAV1
002	TF	VI403	—	175(183.4)	8.4	22.9	—	—	—	RNAV1
003	TF	VI402	—	095(103.6)	8.3	7.7	—	—	—	RNAV1
004	TF	MIZOP	—	095(103.5)	8.3	5.4	—	+5000	-230	RNAV1

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYVI AD 2.22

Changes: STAR MURUN 2B withdrawn; STAR PIFBO 2B added.

©2019 ORO NAVIGACIJA

STANDARD ARRIVAL CHART INSTRUMENT (STAR) - ICAO

TRANSITION ALT 5000

VILNIUS (EYVI) RNAV RWY 19

DIMTA 2B, DUKAT 2B, IRKAL 2B, LAFAT 2B, PIFBO 2B, OTNAV 2B, SOGBI 2B

TABULAR DESCRIPTION

OTNAV 2B

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)/ Time*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	IF	OTNAV	—	—	8.4	—	—	+FL100	-250	RNAV1
002	TF	VI403	—	095(103.3)	8.4	7.3	—	—	—	RNAV1
003	TF	VI402	—	095(103.6)	8.3	7.7	—	—	—	RNAV1
004	TF	MIZOP	—	095(103.5)	8.3	5.4	—	+5000	-230	RNAV1

SOGBI 2B

Serial Number	*Path Descriptor*	*Waypoint Identifier*	*Fly-over*	*Course/Track °M(°T)*	*Magnetic Variation*	*Distance (NM)/ Time*	*Turn Direction*	*Altitude (FT)/ Flight level*	*Speed (KT)*	*Navigation Specification*
001	IF	SOGBI	—	—	8.4	—	—	—	—	RNAV1
002	TF	VI407	—	266(274.4)	8.3	7.0	—	-FL170	—	RNAV1
003	TF	VI408	—	266(274.2)	8.2	13.0	—	—	—	RNAV1
004	TF	VI409	—	336(344.1)	8.2	8.0	—	-FL130	—	RNAV1
005	TF	VI406	—	336(344.1)	8.2	14.0	—	—	—	RNAV1
006	TF	VI401	—	045(052.8)	8.2	14.0	—	-FL110	-250	RNAV1
007	TF	VI402	—	045(053.0)	8.3	13.9	—	—	—	RNAV1
008	TF	MIZOP	—	095(103.5)	8.3	5.4	—	+5000	-230	RNAV1

HOLDINGS INDENTIFICATION

Holding fix	*Geographical coordinates*	*Inbound track °M(°T)*	*Magnetic Variation*	*Outbound distance (NM)/ Time*	*Turn Direction*	*Minimum/Maximum holding altitude (FT)/Flight level*	*Speed (KT)*
EKSAM	54 50 28.1N 025 34 22.5E	244(252.1)	8.3	1 min	R	+5000	-230
MIZOP	54 50 51.1N 025 14 52.6E	104(111.9)	8.3	1 min	L	+5000	-230

WAYPOINT COORDINATES

FIX/POINTS	COORDINATES	FIX/POINTS	COORDINATES
		DUKAT	54 28 17.3N 025 36 55.2E
VI401	54 43 46.8N 024 46 38.8E	**IRKAL**	54 29 02.4N 024 13 11.9E
VI402	54 52 06.2N 025 05 52.4E	**LAFAT**	54 49 52.0N 025 46 43.0E
VI403	54 53 52.4N 024 52 59.1E	**MIZOP**	54 50 51.1N 025 14 52.6E
VI404	54 46 34.0N 025 40 02.2E	**PIFBO**	55 16 42.2N 024 55 18.6E
VI405	54 24 39.3N 024 23 10.9E	**OTNAV**	54 55 33.0N 024 40 36.0E
VI406	54 35 21.1N 024 27 25.6E	**SOGBI**	54 12 47.0N 025 11 45.0E
VI407	54 13 19.0N 024 59 51.0E	**PBZ**	54 55 38.0N 025 14 23.0E
VI408	54 14 14.3N 024 37 45.8E	**SML**	54 40 31.2N 024 41 32.4E
VI409	54 21 55.1N 024 34 01.4E	**VLK**	54 21 02.9N 024 48 13.2E
DIMTA	54 16 57.1N 024 20 08.9E	**VNO**	54 38 09.8N 025 17 37.1E

FOR DETAILED FLIGHT PROCEDURES REFER TO AIP EYVI AD 2.22

Changes: REP PIFBO instead VI304; REP MURUN withdrawn.

©2019 ORO NAVIGACIJA