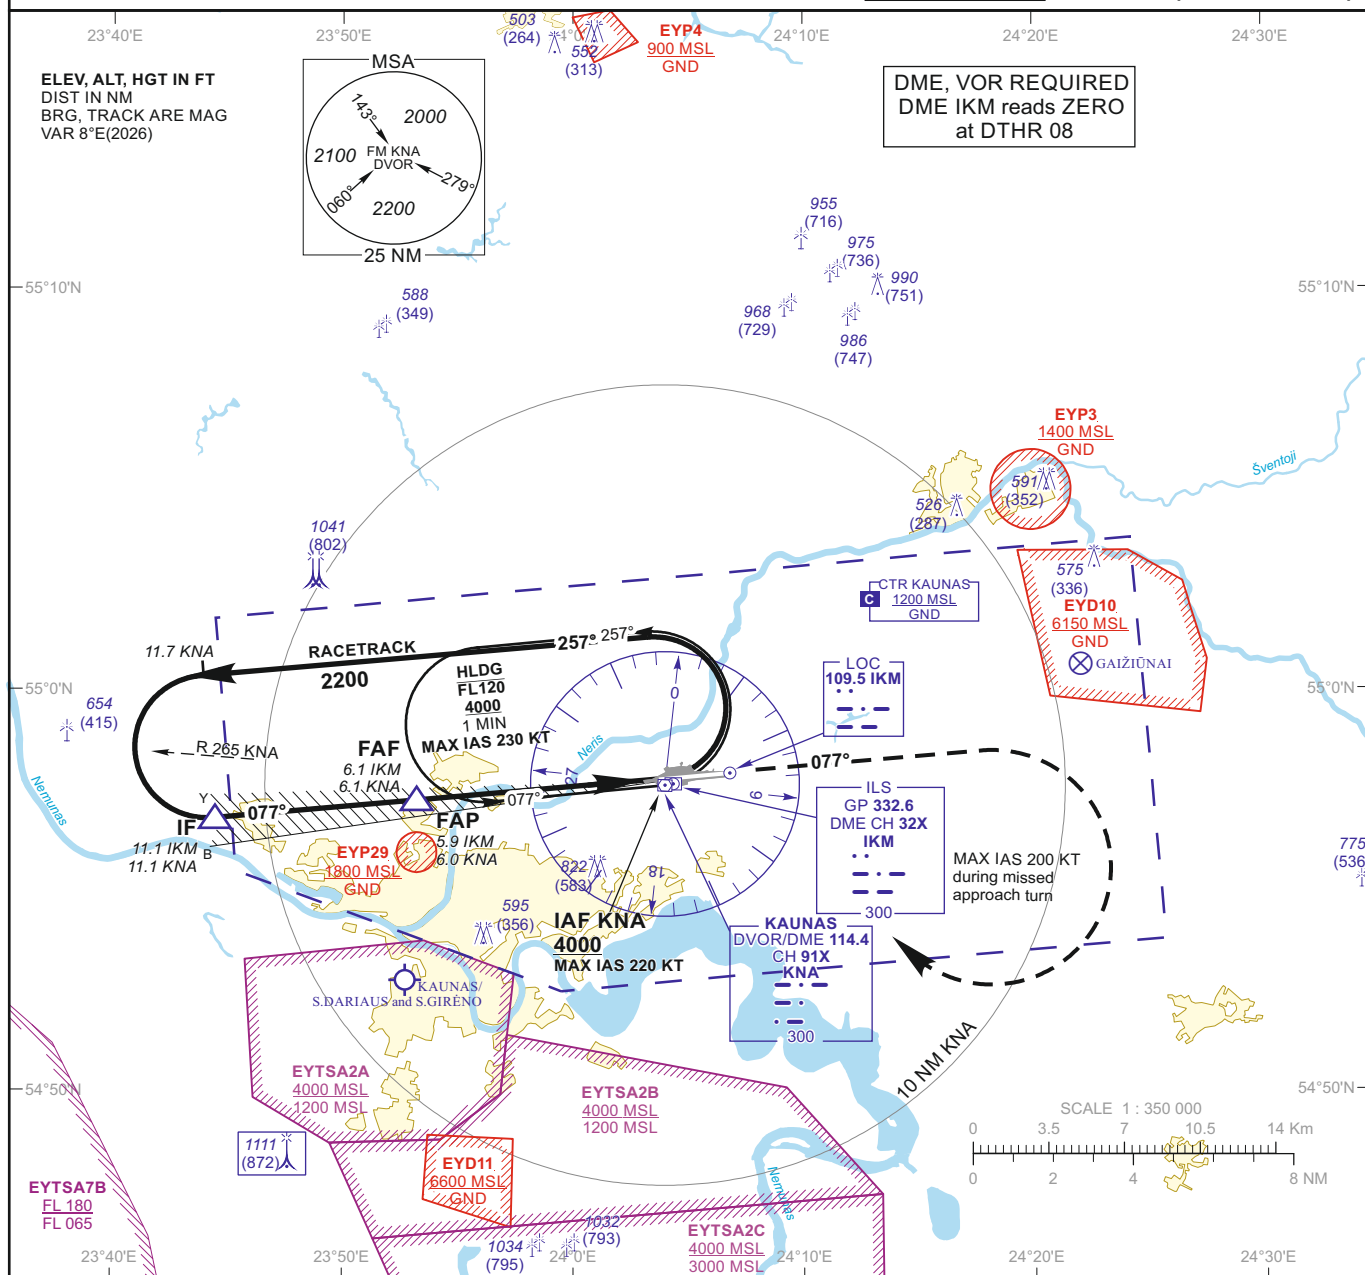



**INSTRUMENT
APPROACH
CHART - ICAO**
AERODROME ELEV 259

 HEIGHTS RELATED TO
DTHR RWY 08 - ELEV 239

 TWR 124.205
118.505
ATIS 129.055

**KAUNAS (EYKA)
ILS Y or LOC RWY 08
(CAT A/B/C/D)**


TRANSITION ALT 5000

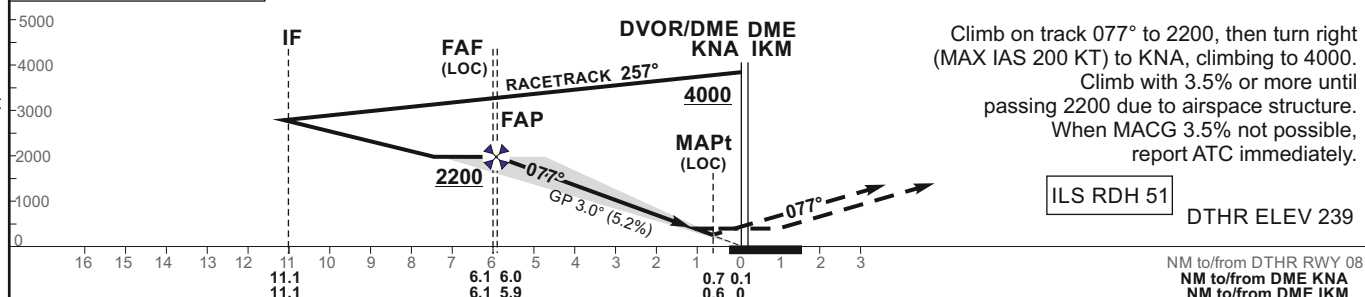MISSED APPROACH


OCA(OCH)		A	B	C	D	DIST DME IKM	5	4	3	2			
STRAIGHT-IN APPROACH	ILS CAT I	505 (266)	518 (279)	526 (287)	536 (297)	Altitude	1870	1560	1240	930			
	LOC	640 (400)				Height	(1631)	(1321)	(1001)	(691)			
CIRCLING		730 (470)	760 (500)	1230 (970)	not authorized	LOC : timing not authorized for defining the MAPt							
						GS	Kts	80	100	120	140	160	180
						FAF - MAPt 5.5 NM	min:sec	4:07	3:18	2:45	2:21	2:04	1:50
						Rate of descent (5.2%)	ft/min	415	520	625	730	835	940
						For data tabulation see verso							

For data tabulation see verso

Changes: date of VAR: Procedures courses; obstacles; missed approach.

11 JUN 2026

©2019 ORO NAVIGACIJA

AIRAC AMDT 03/26

INSTRUMENT APPROACH CHART - ICAO	AERODROME ELEV 259 HEIGHTS RELATED TO DTHR RWY 08 - ELEV 239	KAUNAS (EYKA) ILS Y or LOC RWY 08 (CAT A/B/C/D)
---	---	--

TABULAR DESCRIPTION

ILS or LOC INSTRUMENT APPROACH from IAF(KNA)		
FIX/POINTS	COORDINATES	FIX FORMATION
KNA (IAF)	54 57 37.4N 024 03 59.1E	
IF	54 56 48.0N 023 44 45.0E	BRG 77.38° / 11.12 NM KNA ; BRG 076.86° / 11.06 NM IKM
FAF	54 57 14.8N 023 53 23.4E	BRG 78.15° / 6.12 NM KNA ; BRG 076.86° / 6.05 NM IKM
FAP	54 57 15.6N 023 53 38.8E	BRG 78.19° / 5.97 NM KNA ; BRG 076.86° / 5.90 NM IKM
MAPt	54 57 43.3N 024 02 48.7E	BRG 90.04° / 0.68 NM KNA ; BRG 076.86° / 0.60 NM IKM
DTHR RWY 08	54 57 46.44N 024 03 50.94E	
DME IKM	54 57 42.8N 024 04 08.4E	
LOC IKM	54 57 55.25N 024 06 49.06E	
Final approach (LOC) descent angle: 3.00°		