
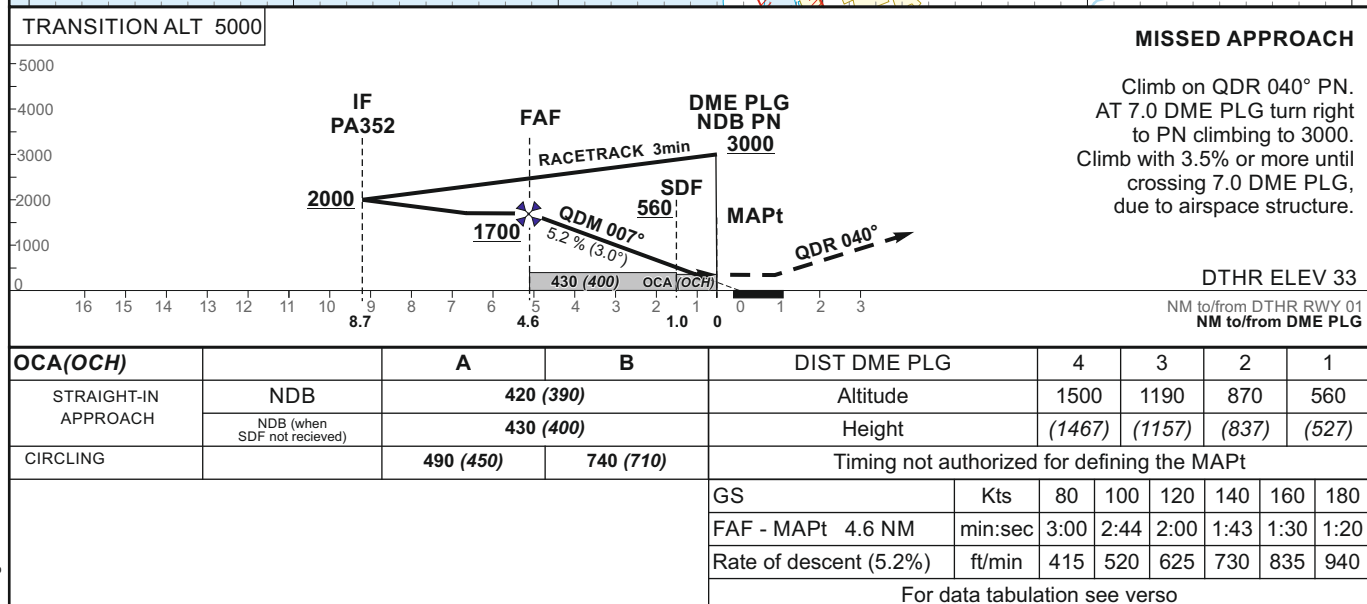


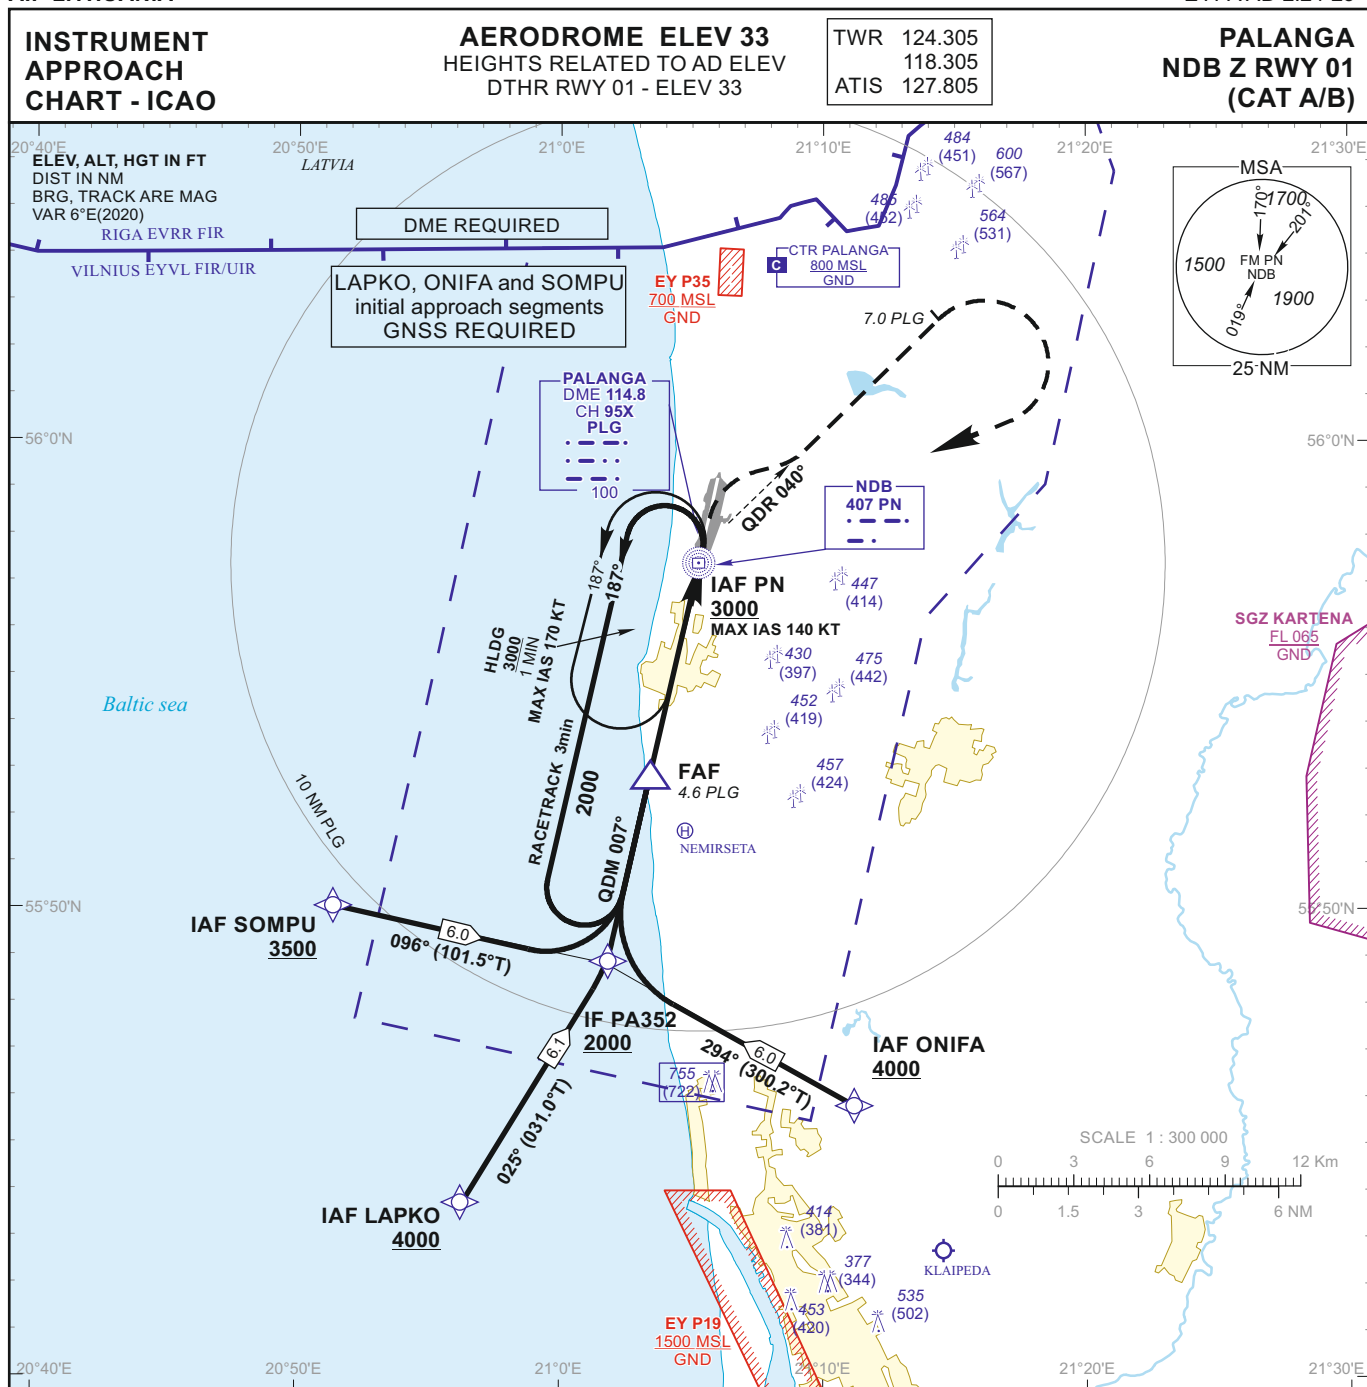

Changes: MSA.

**INSTRUMENT
APPROACH
CHART - ICAO**

AERODROME ELEV 33
HEIGHTS RELATED TO AD ELEV
DTHR RWY 01 - ELEV 33

**PALANGA
NDB Z RWY 01
(CAT A/B)**

TABULAR DESCRIPTION

IAF LAPKO, INITIAL APPROACH

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)/ Time	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	VPA/TCH	Navigation Specification
001	IF	LAPKO	—	—	5.9	—	—	+4000	—	—	RNAV 1
002	TF	PA352	—	025(031.0)	5.9	6.1	—	+2000	—	—	RNAV 1

IAF ONIFA, INITIAL APPROACH

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)/ Time	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	VPA/TCH	Navigation Specification
001	IF	ONIFA	—	—	5.9	—	—	+4000	—	—	RNAV 1
002	TF	PA352	—	294(300.2)	5.9	6.0	—	+2000	—	—	RNAV 1

IAF SOMPU, INITIAL APPROACH

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Magnetic Variation	Distance (NM)/ Time	Turn Direction	Altitude (FT)/ Flight level	Speed (KT)	VPA/TCH	Navigation Specification
001	IF	SOMPU	—	—	5.9	—	—	+3500	—	—	RNAV 1
002	TF	PA352	—	096(101.5)	5.9	6.0	—	+2000	—	—	RNAV 1

NDB INSTRUMENT APPROACH from IAFs(PN, LAPKO, ONIFA, SOMPU)

FIX/POINTS	COORDINATES	FIX FORMATION
LAPKO (IAF)	55 43 39.9N 020 56 15.3E	BRG 014.38° PN ; 14.65 NM PLG
ONIFA (IAF)	55 45 51.4N 021 11 02.4E	BRG 338.24° PN ; 12.01 NM PLG
SOMPU (IAF)	55 50 04.5N 020 51 23.2E	BRG 040.98° PN ; 10.70 NM PLG
PA352 (IF)	55 48 53.5N 021 01 49.1E	BRG 006.85° PN ; 8.73 NM PLG
FAF	55 52 52.8N 021 03 24.9E	BRG 006.85° PN ; 4.63 NM PLG
SDF	55 56 24.9N 021 04 50.1E	BRG 006.85° PN ; 1.00 NM PLG
PN (MAPt, IAF)	55 57 23.1N 021 05 13.5E	
DTHR RWY 01	55 57 51.93N 021 05 25.11E	
DME PLG	55 57 23.5N 021 05 13.4E	
Final approach descent angle: 3.00°		